

## KARTA KATALOGOWA

# R3G630-FB32-03

Wentylator promieniowy EC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Zdjęcie poglądowe


| Dane znamionowe           |                        |
|---------------------------|------------------------|
| Napięcie znamionowe       | 3~ 400 V (380...480 V) |
| Częstotliwość             | 50/60 Hz               |
| Prędkość obrotowa         | 1420 obr/min           |
| Pobór mocy                | 3700 W                 |
| Pobór prądu               | 5,7 A                  |
| Maks. wydajność           | 21500 m³/h             |
| Maks. ciśnienie statyczne | 875 Pa                 |
| Temperatura otoczenia     | -40...+40 °C           |
| Regulacja obrotów         | MODBUS RTU             |

| Budowa              |                            |
|---------------------|----------------------------|
| Wielkość            | 630 mm                     |
| Silnik              | M3G150-IF                  |
| Materiał wirnika    | tworzywo PP                |
| Obudowa elektroniki | odlew aluminiowy           |
| Liczba łopatek      | 6                          |
| Kierunek obrotów    | w prawo, patrząc na wirnik |
| Stopień ochrony     | IP55                       |
| Klasa izolacji      | F                          |
| Łożyskowanie        | kulkowe                    |
| Podłączenie         | skrzynka zaciskowa         |
| Masa                | 28,6 kg                    |

| Dane ErP (UE 327/2011)     |            |
|----------------------------|------------|
| Sprawność całkowita        | 71,4 %     |
| Przepływ w pkt. optymalnym | 12685 m³/h |
| Przyrost ciśnienia         | 711 Pa     |
| Regulacja prędkości (ErP)  | tak        |

## Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

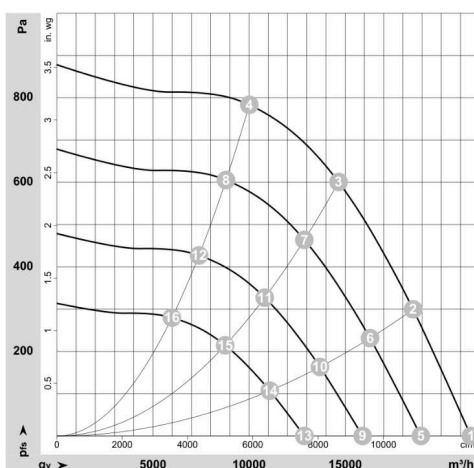

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-194121-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).  
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

## Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199  
biuro@luftberg.pl · www.luftberg.pl

**R3G630-FB32-03**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G630-FB32-03    |            |
| Motor                    | M3G150-IF         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Status                   |                   | prelim.    |
| Speed (rpm)              | min <sup>-1</sup> | 1420       |
| Power consumption        | W                 | 3700       |
| Current draw             | A                 | 5.7        |
| Min. ambient temperature | °C                | -40        |
| Max. ambient temperature | °C                | 40         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

Occasional start-up at temperatures between -40 °C and -25 °C is permitted. For continuous operation at ambient temperatures below -25 °C (such as refrigeration applications), a fan design with special low-temperature bearings must be used.

## Data according to Commission Regulation (EU) 327/2011

|                                   |   | Actual | Req. 2015 |                               |                   |       |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|-------|
| 01 Overall efficiency $\eta_{es}$ | % | 71.4   | 57.4      | 09 Power consumption $P_{ed}$ | kW                | 3.66  |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$             | m <sup>3</sup> /h | 12685 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$ | Pa                | 711   |
| 04 Efficiency grade N             |   | 76     | 62        | 10 Speed (rpm) n              | min <sup>-1</sup> | 1420  |
| 05 Variable speed drive           |   | Yes    |           | 11 Specific ratio*            |                   | 1.01  |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-194121


**ebmpapst**

**R3G630-FB32-03**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 28.6 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Size                                                                       | 630 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Motor size                                                                 | 150                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Number of blades                                                           | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Moisture (F) / Environmental (H) protection class                          | H1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Ambient temperature note                                                   | Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Operation and alarm display with LED</li> <li>- External 15-50 VDC input (parameterization)</li> <li>- Alarm relay</li> <li>- Integrated PI controller</li> <li>- Configurable inputs/outputs (I/O)</li> <li>- MODBUS V6.0</li> <li>- Motor current limitation</li> <li>- RFID - ISO 15693 compatible</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Voltage output 3.3-24 VDC, Pmax = 800 mW</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Conformity with standards                                                  | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Approval                                                                   | UL 1004-7 + 60730-1; EAC; CSA C22.2 No. 77 + CAN/CSA-E60730-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |




**R3G630-FB32-03**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Product drawing

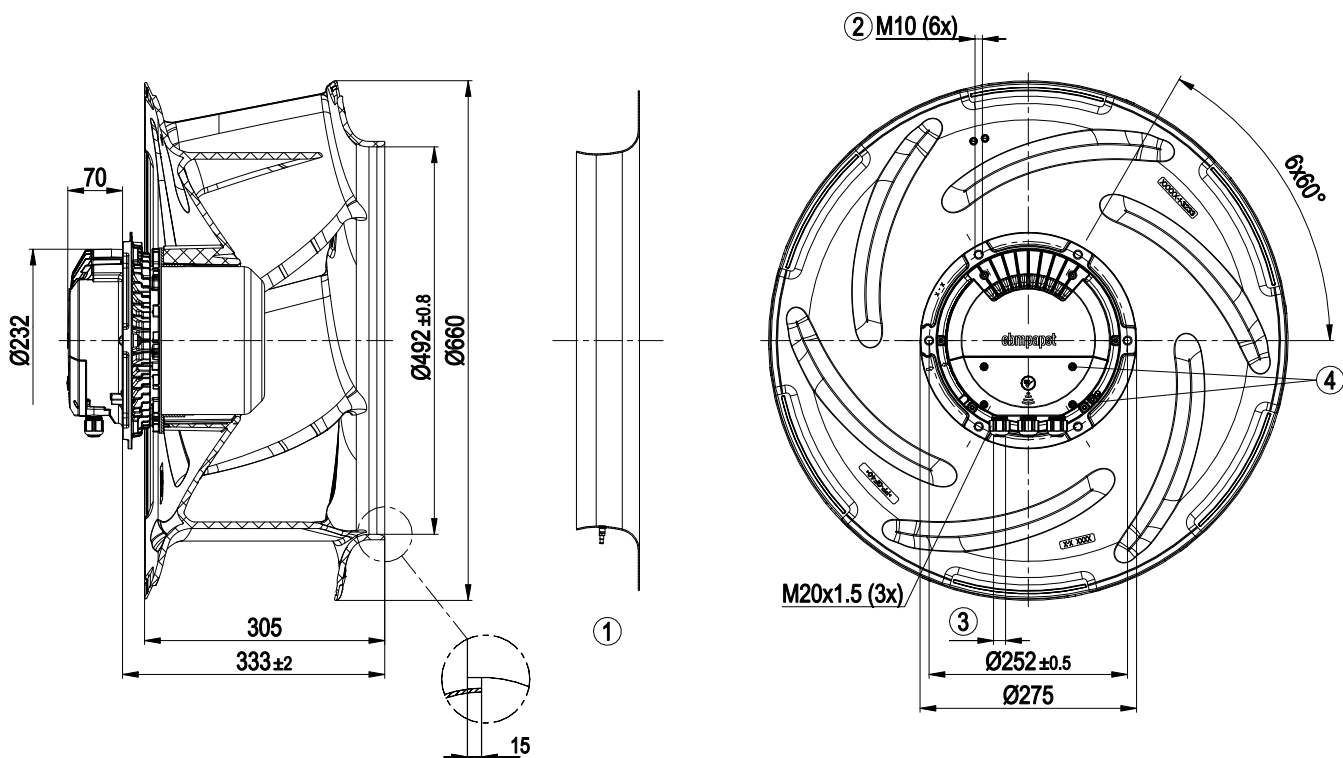


|   |                                                                                                            |
|---|------------------------------------------------------------------------------------------------------------|
| 1 | Accessory part: Inlet ring 63355-2-4013 with pressure tap (k-factor 545) not included in scope of delivery |
| 2 | Max. clearance for screw 20 mm                                                                             |
| 3 | Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm                                     |
| 4 | Tightening torque $1.5 \pm 0.2$ Nm                                                                         |

R3G630-FB32-03

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Accessory part

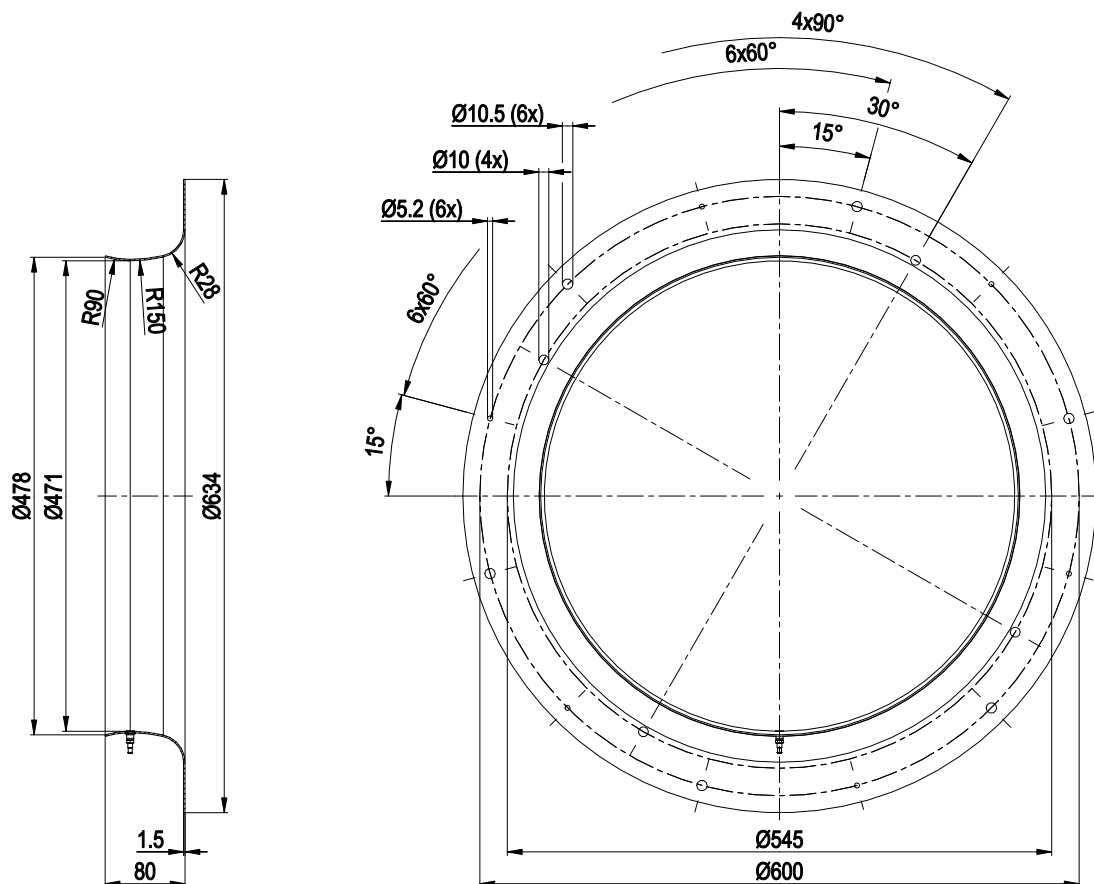


Inlet ring 63355-2-4013 with pressure tap (k-factor 545)

R3G630-FB32-03

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Connection diagram

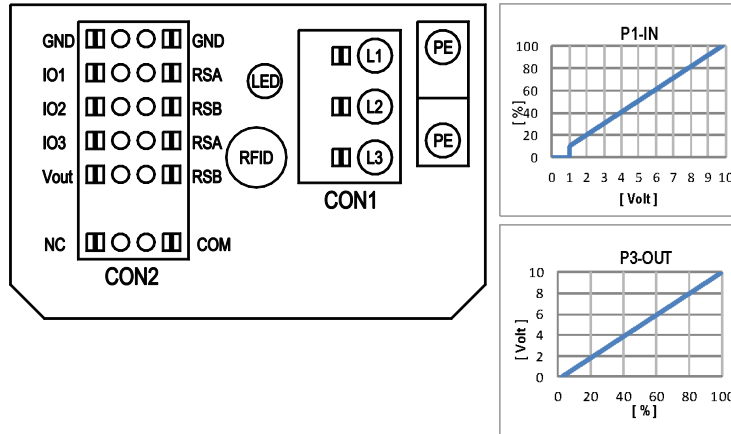

| No. | Conn. | Designation | Function/assignment                                                                                                                                                                                                                                                                                                                             |
|-----|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|     | CON1  | L1, L2, L3  | Power supply, phase, see nameplate for voltage range                                                                                                                                                                                                                                                                                            |
|     | PE    | PE          | Protective earth                                                                                                                                                                                                                                                                                                                                |
|     | CON2  | RSA         | RS485 interface for MODBUS, RSA; SELV                                                                                                                                                                                                                                                                                                           |
|     | CON2  | RSB         | RS485 interface for MODBUS, RSB; SELV                                                                                                                                                                                                                                                                                                           |
|     | CON2  | GND         | Reference ground for control interface, SELV                                                                                                                                                                                                                                                                                                    |
|     | CON2  | IO1         | Function parameterizable (see "Optional interface functions" table)<br>Factory setting:<br>Digital input - high active, function: Disable input, SELV<br>- inactive: Pin open or applied voltage < 1.5 VDC<br>- active: applied voltage 3.5-50 VDC<br>Reset function: Triggering of error reset on change of state from "enabled" to "disabled" |
|     | CON2  | IO2         | Function parameterizable (see "Optional interface functions" table)<br>Factory setting:<br>Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value<br>Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV                                                                                                       |
|     | CON2  | IO3         | Function parameterizable (see "Optional interface functions" table)<br>Factory setting:<br>Analog output 0-10 V, max. 5 mA, function: Fan modulation level<br>Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV                                                                                               |
|     | CON2  | Vout        | Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable<br>Factory setting: 10 VDC<br>short-circuit-proof, supply for external devices, SELV<br>alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage                                                                                                 |
|     | CON2  | COM         | Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side                                                                                                                                                                   |
|     | CON2  | NC          | Status relay, floating status contact, break for failure                                                                                                                                                                                                                                                                                        |
|     |       | LED         | green: status = good, ready for operation<br>orange: status = warning<br>red: status = failure                                                                                                                                                                                                                                                  |
|     |       | P1-IN       | Input characteristic curve                                                                                                                                                                                                                                                                                                                      |
|     |       | P3-OUT      | Output characteristic curve                                                                                                                                                                                                                                                                                                                     |

R3G630-FB32-03

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Terminal/plug assignment

|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 |                                   |                                         |                                                                                                                                                                                                                     |                                                                                 |                |          |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |   |   |   |   |  |   |  |
|-----------------------|-------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------|---|----------------------|---|--------------------------------|---|-----------------------|---|-----------------------------------------|---|-----------------------|---|------------------|---|-------------------------|---|-------------------|---|----------------------|---|-----------------------------------|---|-------------------|---|-------------------------------------|---|-------------------|---|---------------------------------|-----------------------------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|----------------|----------|-----------------------------------------------------------------------------------------------------------|---|----------------|---|-----------------------------------------------------------------------------------------------------------|---|----------------|---|-----------------------------------------------------------------------------------------------------------|---|----------------|---|-----------------------------------------------------------------------------------------------------------|---|----------------|---|-----------------------------------------------------------------------------------------------------------|---|----------------|---|-----------------------------------------------------------------------------------------------------------|---|---|---|---|---|--|---|--|
| ○ configurable option |                                     |                                                                                             | configurable IO functions: normal / inverse                                                               | MODBUS Register for IO mode configuration                                                                                     |            | electrical specification |   | configurable IO mode |   | OUTPUT                         |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 |                                   |                                         |                                                                                                                                                                                                                     |                                                                                 |                |          |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |   |   |   |   |  |   |  |
| CON2                  |                                     | D101 [...] D147 [...]                                                                       |                                                                                                           |                                                                                                                               |            |                          |   | source: set value    |   | switch: parameter set: #1 / #2 |   | D12E [...] D148 [...] |   | switch: direction of rotation: cw / ccw |   | D16C [...] D16A [...] |   | signal: tach out |   | signal: diagnostics out |   | D130 [0] D130 [1] |   | signal: actual speed |   | signal: system modulation level % |   | D130 [2] D130 [5] |   | signal: remote control output 0-10V |   | D00C [1] D130 [4] |   | pulse input for auto-addressing |                                   | pulse output for auto-addressing        |                                                                                                                                                                                                                     |                                                                                 |                |          |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |   |   |   |   |  |   |  |
| IO1                   | ○ Din1 (active high): digital input | not active: pin open or applied voltage < 1.5VDC<br>active: applied voltage 3.5-50VDC, SELV | D158 [0]                                                                                                  | ○                                                                                                                             | ○          | ○                        | ○ | ○                    | ○ | ○                              | ○ | ○                     | ○ | ○                                       | ○ | ○                     | ○ | ○                | ○ | ○                       | ○ | ○                 | ○ | ○                    | ○ | ○                                 | ○ | ○                 | ○ | ○                                   | ○ | ○                 | ○ | ○                               | ○                                 |                                         |                                                                                                                                                                                                                     |                                                                                 |                |          |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |   |   |   |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 |                                   | Ain1 0-10V/PWM: analog input            |                                                                                                                                                                                                                     | Ri=100K, characteristic curve parameterizable, f <sub>PWM</sub> =1k..10KHz SELV |                | D158 [2] |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |   | ○ |   | ○ |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 |                                   | Tach out (open collector output)        |                                                                                                                                                                                                                     | U <sub>max</sub> =50VDC, I <sub>max</sub> =20mA SELV                            |                | D158 [5] |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |   | ○ |   | ○ |  | ○ |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 |                                   | Diagnostics out (open collector output) |                                                                                                                                                                                                                     | U <sub>max</sub> =50VDC, I <sub>max</sub> =20mA SELV                            |                | D158 [6] |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |                | ○ |                                                                                                           | ○ |   | ○ |   | ○ |  | ○ |  |
| IO2                   | ○ Din2 (active high): digital input | not active: pin open or applied voltage < 1.5VDC<br>active: applied voltage 3.5-50VDC, SELV | D159 [0]                                                                                                  | ○                                                                                                                             | ○          | ○                        | ○ | ○                    | ○ | ○                              | ○ | ○                     | ○ | ○                                       | ○ | ○                     | ○ | ○                | ○ | ○                       | ○ | ○                 | ○ | ○                    | ○ | ○                                 | ○ | ○                 | ○ | ○                                   | ○ | ○                 | ○ | ○                               |                                   |                                         |                                                                                                                                                                                                                     |                                                                                 |                |          |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |   |   |   |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 | Ain2 0-10V/PWM: analog input      |                                         | Ri=100K, characteristic curve parameterizable, f <sub>PWM</sub> =1k..10KHz SELV                                                                                                                                     |                                                                                 | D159 [2]       |          | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○ |   | ○ |   |  |   |  |
| IO3                   | ○ Ain2 4-20mA: analog input         | Ri=125R, characteristic curve parameterizable, SELV                                         | D159 [3]                                                                                                  | ○                                                                                                                             | ○          | ○                        | ○ | ○                    | ○ | ○                              | ○ | ○                     | ○ | ○                                       | ○ | ○                     | ○ | ○                | ○ | ○                       | ○ | ○                 | ○ | ○                    | ○ | ○                                 | ○ | ○                 | ○ | ○                                   | ○ | ○                 | ○ | ○                               |                                   |                                         |                                                                                                                                                                                                                     |                                                                                 |                |          |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |   |   |   |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 | Din3 (active high): digital input |                                         | not active: pin open or applied voltage < 1.5VDC<br>active: applied voltage 3.5-50VDC, SELV                                                                                                                         |                                                                                 | D15A [0]       |          | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○ |   |   |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 | Din3 (active low): digital input  |                                         | not active: pin open or applied voltage < 1.5VDC<br>active: pin open or applied voltage 3.5-50VDC<br>not active: applied voltage < 1.5VDC, SELV                                                                     |                                                                                 | D15A [1]       |          | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○ |   | ○ |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 | PWMIn3: digital input             |                                         | 40Hz - 10kHz, characteristics parameterizable<br>not active: pin open or applied voltage 3.5-50VDC<br>active: applied voltage < 1.5VDC, SELV<br>function parameterizable, max. 5mA, max output frequency 300Hz SELV |                                                                                 | D15A [7]       |          | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○ |   | ○ |   |  |   |  |
| IO3                   | ○ Aout3 0-10V: analog output        | 0-10V max. 5mA, max output frequency 300Hz, SELV                                            | D15A [4]                                                                                                  | ○                                                                                                                             | ○          | ○                        | ○ | ○                    | ○ | ○                              | ○ | ○                     | ○ | ○                                       | ○ | ○                     | ○ | ○                | ○ | ○                       | ○ | ○                 | ○ | ○                    | ○ | ○                                 | ○ | ○                 | ○ | ○                                   | ○ | ○                 | ○ | ○                               |                                   |                                         |                                                                                                                                                                                                                     |                                                                                 |                |          |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |   |   |   |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 | Tacho out (pulses): analog output |                                         | 0-10V max. 5mA, max output frequency 300Hz, SELV                                                                                                                                                                    |                                                                                 | D15A [5]       |          | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○ |   |   |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 | Diagnostics out (pulses)          |                                         | 0-10V max. 5mA, max output frequency 300Hz, SELV                                                                                                                                                                    |                                                                                 | D15A [6]       |          | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○ |   | ○ |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 | RS485 bus connection,             |                                         | MODBUS RTU, specification V6.0, SELV                                                                                                                                                                                |                                                                                 | D15A [6]       |          | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○              |   | ○                                                                                                         |   | ○ |   | ○ |   |  |   |  |
| RSA                   | RSB                                 | voltage output                                                                              | alternatively: Input auxiliary power supply for parameterization via RS485MODBUS RTU without line voltage | voltage parameterizable 3.3...24VDC +/- 5.5%, P <sub>max</sub> =800mW, short-circuit-proof, supply for external devices, SELV | D16E [...] | ○                        | ○ | ○                    | ○ | ○                              | ○ | ○                     | ○ | ○                                       | ○ | ○                     | ○ | ○                | ○ | ○                       | ○ | ○                 | ○ | ○                    | ○ | ○                                 | ○ | ○                 | ○ | ○                                   | ○ | ○                 | ○ | ○                               |                                   |                                         |                                                                                                                                                                                                                     |                                                                                 |                |          |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |                |   |                                                                                                           |   |   |   |   |   |  |   |  |
|                       |                                     |                                                                                             |                                                                                                           |                                                                                                                               |            |                          |   |                      |   |                                |   |                       |   |                                         |   |                       |   |                  |   |                         |   |                   |   |                      |   |                                   |   |                   |   |                                     |   |                   |   |                                 | voltage output                    |                                         | alternatively: Input auxiliary power supply for parameterization via RS485MODBUS RTU without line voltage                                                                                                           |                                                                                 | voltage output |          | alternatively: Input auxiliary power supply for parameterization via RS485MODBUS RTU without line voltage |   | voltage output |   | alternatively: Input auxiliary power supply for parameterization via RS485MODBUS RTU without line voltage |   | voltage output |   | alternatively: Input auxiliary power supply for parameterization via RS485MODBUS RTU without line voltage |   | voltage output |   | alternatively: Input auxiliary power supply for parameterization via RS485MODBUS RTU without line voltage |   | voltage output |   | alternatively: Input auxiliary power supply for parameterization via RS485MODBUS RTU without line voltage |   | voltage output |   | alternatively: Input auxiliary power supply for parameterization via RS485MODBUS RTU without line voltage |   |   |   |   |   |  |   |  |

◦ configurable option


For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.0

R3G630-FB32-03

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Curves: Air performance 50 Hz

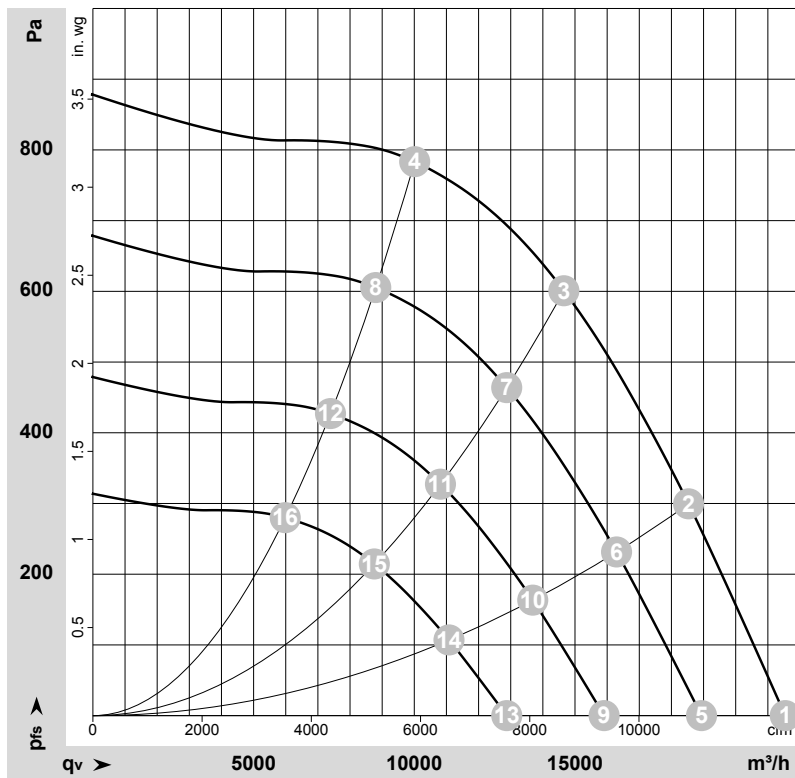

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-194121-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|----------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m³/h           | Pa              | cfm            | in. wg          |
| 1  | 3~    | 400 | 50 | 1420              | 2234            | 3.47 | 81                | 89                | 92                 | 21540          | 0               | 12680          | 0.00            |
| 2  | 3~    | 400 | 50 | 1420              | 3118            | 4.78 | 80                | 86                | 89                 | 18535          | 300             | 10910          | 1.20            |
| 3  | 3~    | 400 | 50 | 1420              | 3700            | 5.70 | 73                | 81                | 85                 | 14655          | 600             | 8625           | 2.41            |
| 4  | 3~    | 400 | 50 | 1420              | 3520            | 5.38 | 73                | 81                | 85                 | 10010          | 780             | 5890           | 3.13            |
| 5  | 3~    | 400 | 50 | 1250              | 1517            | 2.36 | 78                | 86                | 89                 | 18935          | 0               | 11145          | 0.00            |
| 6  | 3~    | 400 | 50 | 1250              | 2118            | 3.25 | 77                | 83                | 85                 | 16295          | 232             | 9590           | 0.93            |
| 7  | 3~    | 400 | 50 | 1250              | 2514            | 3.84 | 70                | 78                | 82                 | 12875          | 465             | 7580           | 1.87            |
| 8  | 3~    | 400 | 50 | 1250              | 2391            | 3.65 | 70                | 78                | 82                 | 8800           | 609             | 5180           | 2.44            |
| 9  | 3~    | 400 | 50 | 1050              | 899             | 1.40 | 74                | 82                | 84                 | 15905          | 0               | 9365           | 0.00            |
| 10 | 3~    | 400 | 50 | 1050              | 1255            | 1.92 | 73                | 78                | 81                 | 13685          | 164             | 8055           | 0.66            |
| 11 | 3~    | 400 | 50 | 1050              | 1490            | 2.27 | 65                | 73                | 77                 | 10815          | 328             | 6365           | 1.32            |
| 12 | 3~    | 400 | 50 | 1050              | 1417            | 2.16 | 65                | 73                | 77                 | 7390           | 430             | 4350           | 1.73            |
| 13 | 3~    | 400 | 50 | 850               | 477             | 0.74 | 68                | 76                | 79                 | 12875          | 0               | 7580           | 0.00            |
| 14 | 3~    | 400 | 50 | 850               | 666             | 1.02 | 67                | 73                | 76                 | 11080          | 107             | 6520           | 0.43            |
| 15 | 3~    | 400 | 50 | 850               | 791             | 1.21 | 60                | 68                | 72                 | 8755           | 215             | 5155           | 0.86            |
| 16 | 3~    | 400 | 50 | 850               | 752             | 1.15 | 60                | 68                | 72                 | 5985           | 282             | 3520           | 1.13            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

