

KARTA KATALOGOWA

R4D355-RB04-09

Wentylator promieniowy AC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Zdjęcie poglądowe

Dane znamionowe

Napięcie znamionowe	3~ 400 V Δ / 400 V Y
Częstotliwość	50 Hz (dane 60 Hz na karcie producenta)
Prędkość obrotowa	1350 / 1020 obr/min
Pobór mocy	250 / 170 W
Pobór prądu	0,5 / 0,3 A
Maks. wydajność	3170 m³/h
Maks. ciśnienie statyczne	280 Pa
Temperatura otoczenia	-25...+70 °C

Budowa


Średnica wirnika	355 mm
Materiał wirnika	tworzywo PP
Liczba łopatek	6
Stopień ochrony	IP44
Klasa izolacji	F
Zabezpieczenie silnika	termik (TOP) wyprowadzony
Masa	5,6 kg

Dane ErP (UE 327/2011)

Sprawność całkowita	48,1 %
Przepływ w pkt. optymalnym	2005 m³/h
Przyrost ciśnienia	216 Pa
Regulacja obrotów	nie

Charakterystyka przepływowa

Charts: Air flow 50 Hz

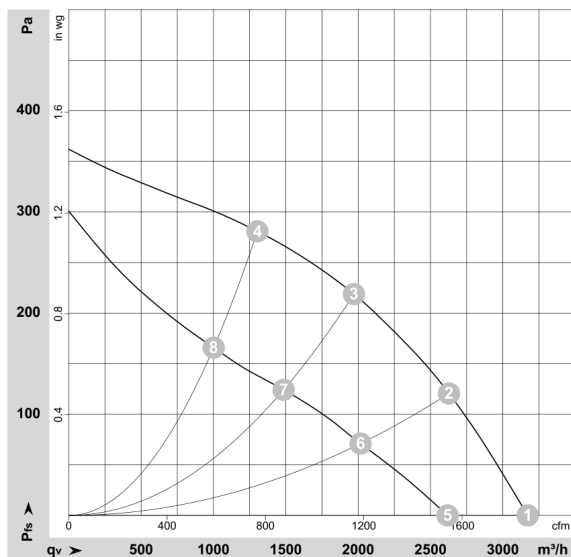

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-167387-1
Measurement: LU-167463-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).

Dwie wartości odpowiadają połączeniu Δ / Y przy 50 Hz, 400 V; pozostałe warianty zasilania – na kolejnych stronach (karta producenta).

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R4D355-RB04-09

AC centrifugal fan - RadiCal

backward curved, single inlet

Nominal data

Type	R4D355-RB04-09				
Motor	M4D074-GA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	400	400
Connection		Δ	Y	Δ	Y
Frequency	Hz	50	50	60	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	1350	1020	1460	900
Power input	W	250	170	370	185
Current draw	A	0.5	0.3	0.66	0.34
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	70	70	40	40
Starting current	A	1.5	0.47	1.37	0.31

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011 (EN 17166)

		Actual	Request 2015			
01 Overall efficiency η_{es}	%	48.1	45.2	09 Power input P_e	kW	0.24
02 Measurement category		A		09 Air flow q_v	m³/h	2005
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	216
04 Efficiency grade N		64.9	62	10 Speed (rpm) n	min ⁻¹	1350
05 Variable speed drive		No		11 Specific ratio*		1.00

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$ LU-167387



R4D355-RB04-09

AC centrifugal fan - RadiCal

backward curved, single inlet

Technical features


Mass	5.6 kg
Size	355 mm
Motor size	74
Material of impeller	PP plastic
Number of blades	6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP44; Depending on installation and position as per EN 60034-5
Insulation class	"F"
Humidity (F) / environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE

R4D355-RB04-09

AC centrifugal fan - RadiCal

backward curved, single inlet

Product drawing

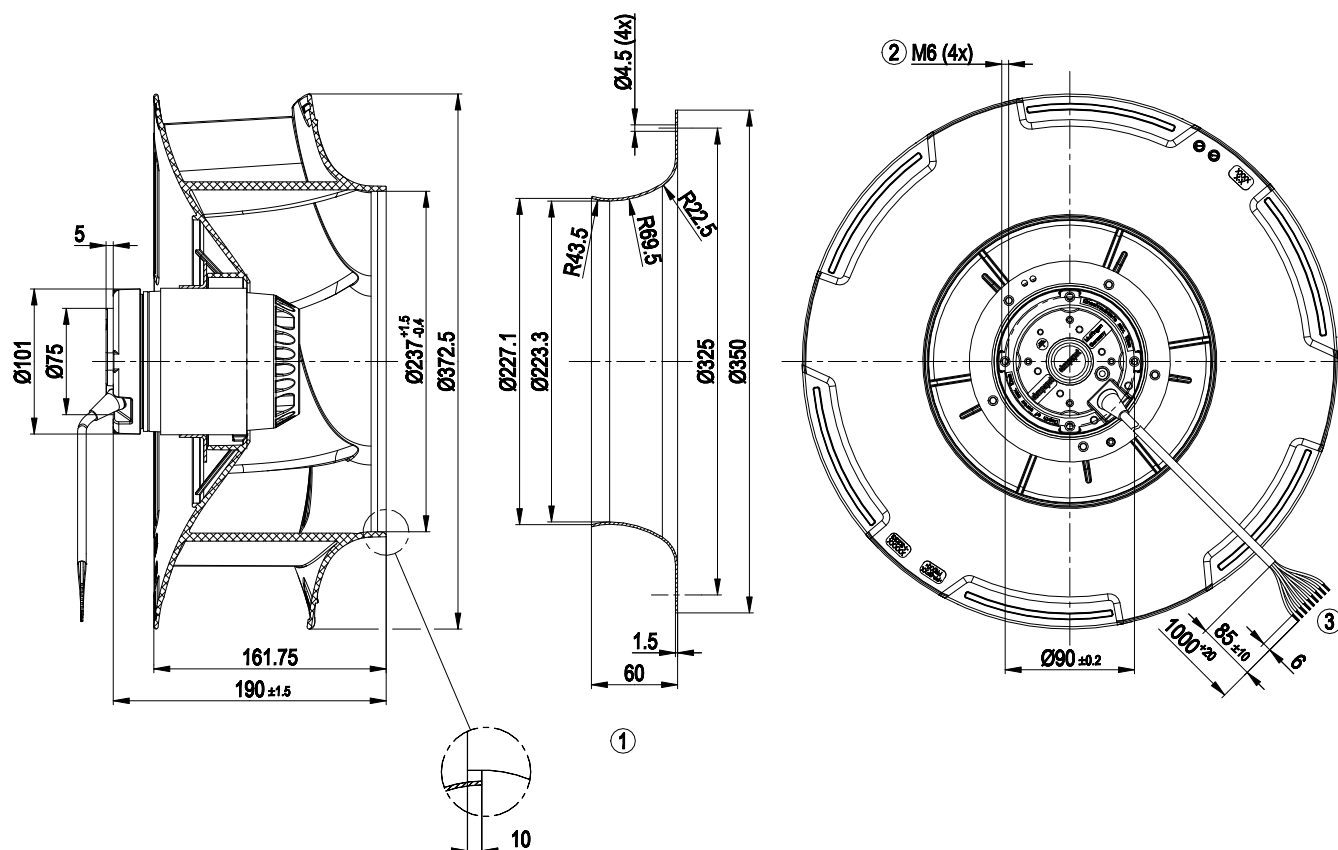


- | | |
|---|---|
| 1 | Accessory part: Inlet nozzle 35500-2-4013 not included in scope of delivery |
| 2 | Thread reach max. 10 mm |
| 3 | Connection line silicone 9G 0.5 mm ² , 9x lead tips crimped |

R4D355-RB04-09

AC centrifugal fan - RadiCal

backward curved, single inlet

Connection screen

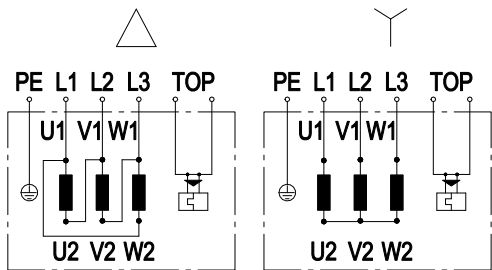

Note: Change in direction of rotation by reversing two phases

Δ	Delta connection	Y	Star connection	L1	black
L2	blue	L3	brown	U1	black
V1	blue	W1	brown	U2	green
V2	white	W2	yellow	TOP	2xgrey
PE	green/yellow				




R4D355-RB04-09

AC centrifugal fan - RadiCal

backward curved, single inlet

Charts: Air flow 50 Hz

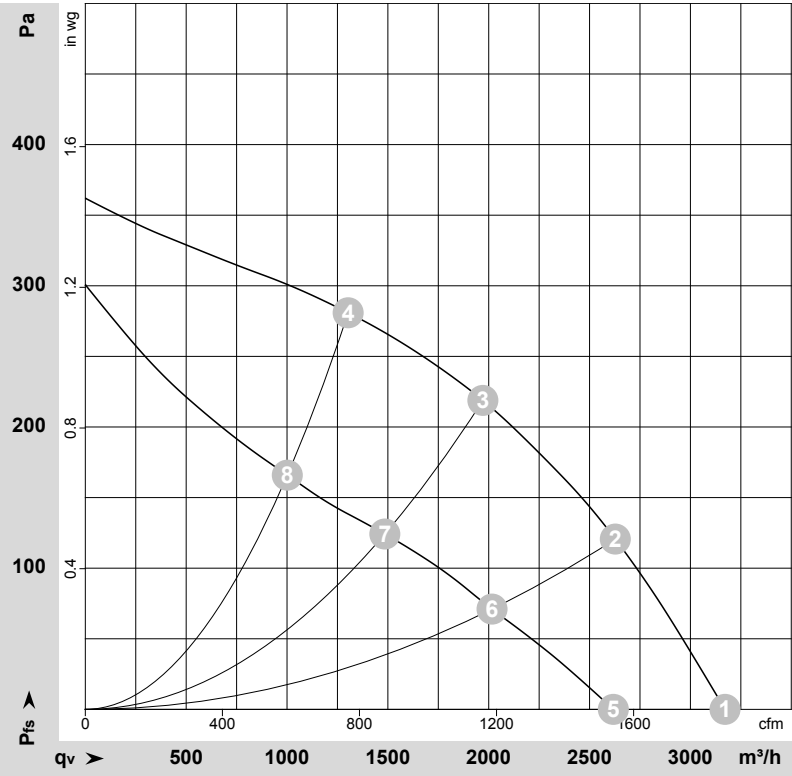

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-167387-1
Measurement: LU-167463-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	Δ	400	50	1400	187	0.43	3170	0	1865	0.00
2	Δ	400	50	1365	230	0.48	2630	120	1545	0.48
3	Δ	400	50	1350	250	0.50	1970	220	1160	0.88
4	Δ	400	50	1360	237	0.48	1305	280	765	1.12
5	Y	400	50	1160	140	0.24	2620	0	1540	0.00
6	Y	400	50	1055	163	0.28	2015	71	1185	0.29
7	Y	400	50	1020	170	0.30	1485	124	875	0.50
8	Y	400	50	1045	164	0.29	1000	166	590	0.67

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase




R4D355-RB04-09

AC centrifugal fan - RadiCal

backward curved, single inlet

Charts: Air flow 60 Hz

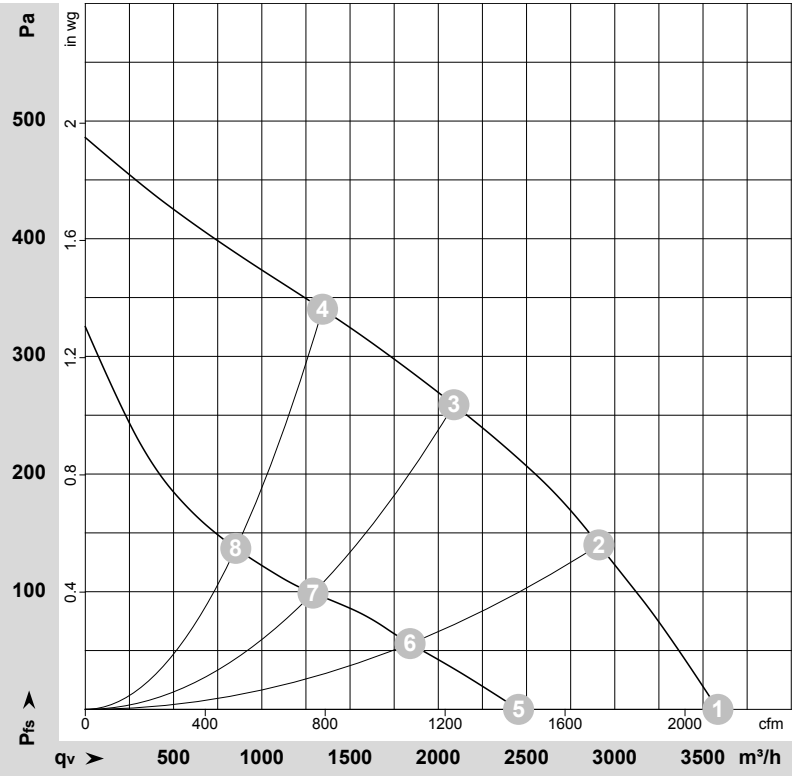

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-167462-1
Measurement: LU-167464-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	Δ	400	60	1580	278	0.51	3585	0	2110	0.00
2	Δ	400	60	1500	345	0.62	2910	140	1715	0.56
3	Δ	400	60	1460	370	0.66	2090	260	1230	1.04
4	Δ	400	60	1490	346	0.62	1345	340	790	1.36
5	Y	400	60	1090	172	0.31	2455	0	1445	0.00
6	Y	400	60	955	183	0.34	1840	56	1085	0.22
7	Y	400	60	900	185	0.34	1290	99	760	0.40
8	Y	400	60	945	182	0.33	855	137	500	0.55

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

