

KARTA KATALOGOWA

R4D560-AQ03-01

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Dane znamionowe


Napięcie znamionowe	3~ 230 V Δ / 400 V Y
Częstotliwość	50 Hz
Prędkość obrotowa	1365 obr/min
Pobór mocy	2380 W
Pobór prądu	8,65 / 5,0 A
Maks. wydajność	11700 m³/h
Maks. ciśnienie statyczne	720 Pa
Temperatura otoczenia	-40...+60 °C

Budowa

Średnica wirnika	560 mm
Materiał wirnika	blacha aluminiowa
Liczba łopatek	9
Stopień ochrony	IP54
Klasa izolacji	F
Zabezpieczenie silnika	termik (TOP)
Masa	27,1 kg

Charakterystyka przepływowa

Curves: Air performance 50 Hz Y

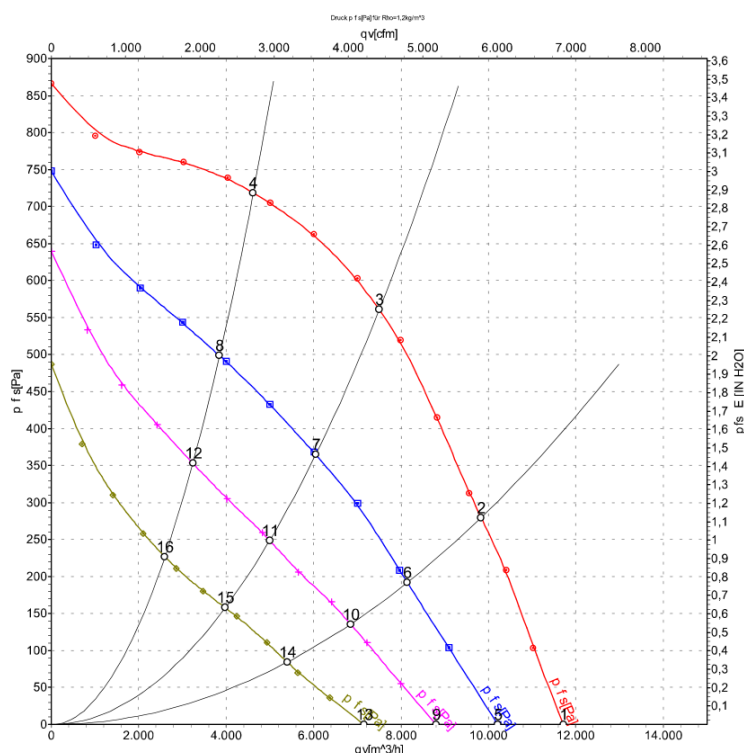

Measurement: LU-70083-1
Measurement: LU-70117-1
Measurement: LU-70119-1
Measurement: LU-70120-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).

Dwie wartości odpowiadają połączeniu Δ / Y (kolumny karty producenta); producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R4D560-AQ03-01

AC centrifugal fan

backward-curved, single-intake


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R4D560-AQ03-01		
Motor	M4D138-LA		
Phase		3~	3~
Nominal voltage	VAC	230	400
Wiring		Δ	Y
Frequency	Hz	50	50
Method of obtaining data		ml	ml
Valid for approval/standard		-	-
Speed (rpm)	min ⁻¹	1365	1365
Power consumption	W	2380	2380
Current draw	A	8.65	5.0
Min. back pressure	Pa	0	0
Min. back pressure	in. wg	0	0
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	60	60
Starting current	A	47	27

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R4D560-AQ03-01

AC centrifugal fan

backward-curved, single-intake

Technical description

Weight	27.1 kg
Size	560 mm
Motor size	138
Rotor surface	Cast in aluminum
Impeller material	Sheet aluminum
Number of blades	9
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	On rotor and stator sides
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1 (2010)
Approval	EAC; VDE




R4D560-AQ03-01

AC centrifugal fan

backward-curved, single-intake

Product drawing

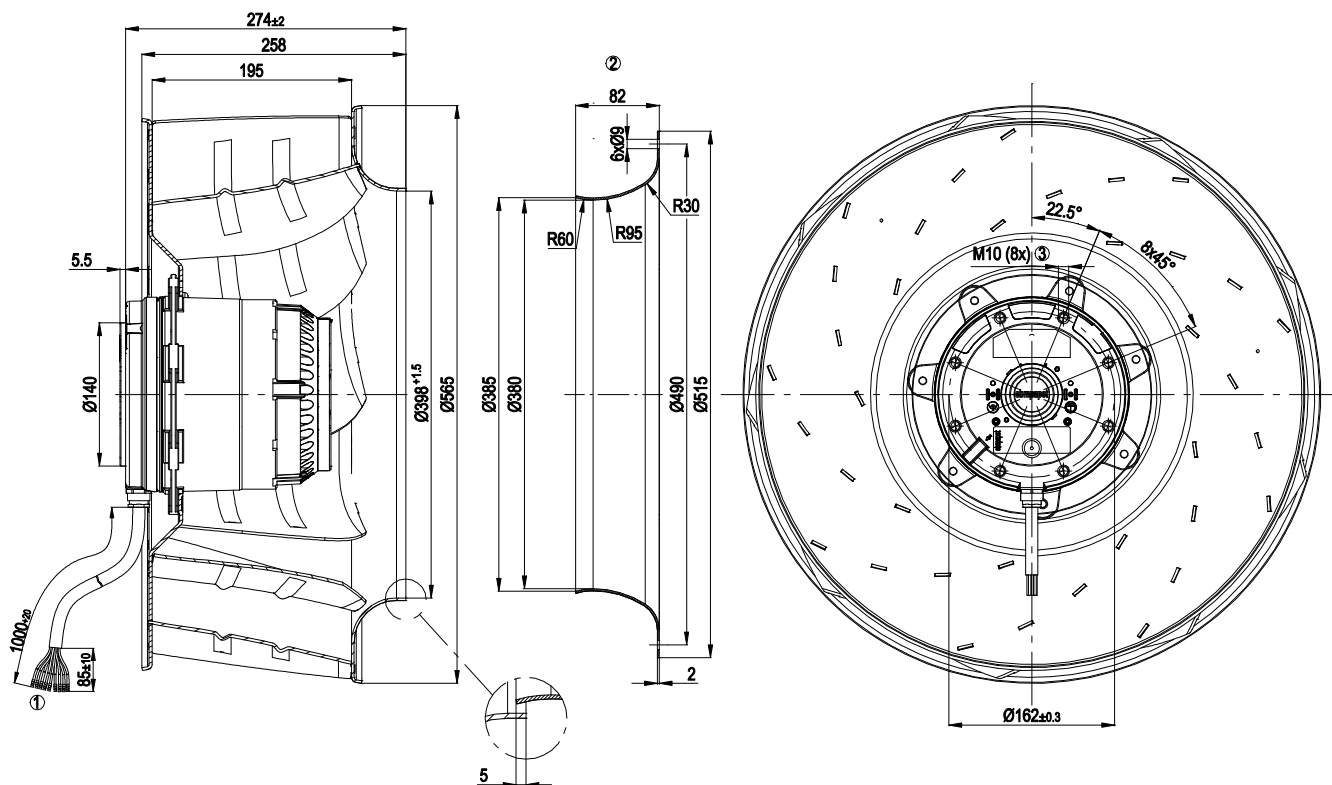


- | | |
|---|--|
| 1 | Cable halogen-free, 9 x 0.75 mm ² , 9 x crimped splices |
| 2 | Accessory part: Inlet ring 63071-2-4013 not included in scope of delivery. |
| 3 | Max. clearance for screw 18 mm |

R4D560-AQ03-01

AC centrifugal fan
backward-curved, single-intake

Connection diagram

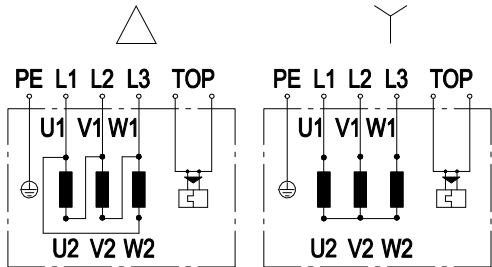

Note: Change of rotation direction by reversing two phases

Δ	Delta connection	Y	Star connection	L1	black
L2	blue	L3	brown	U1	black
V1	blue	W1	brown	U2	green
V2	white	W2	yellow	TOP	2x gray
PE	green/yellow				




R4D560-AQ03-01

AC centrifugal fan

backward-curved, single-intake

Curves: Air performance 50 Hz Y

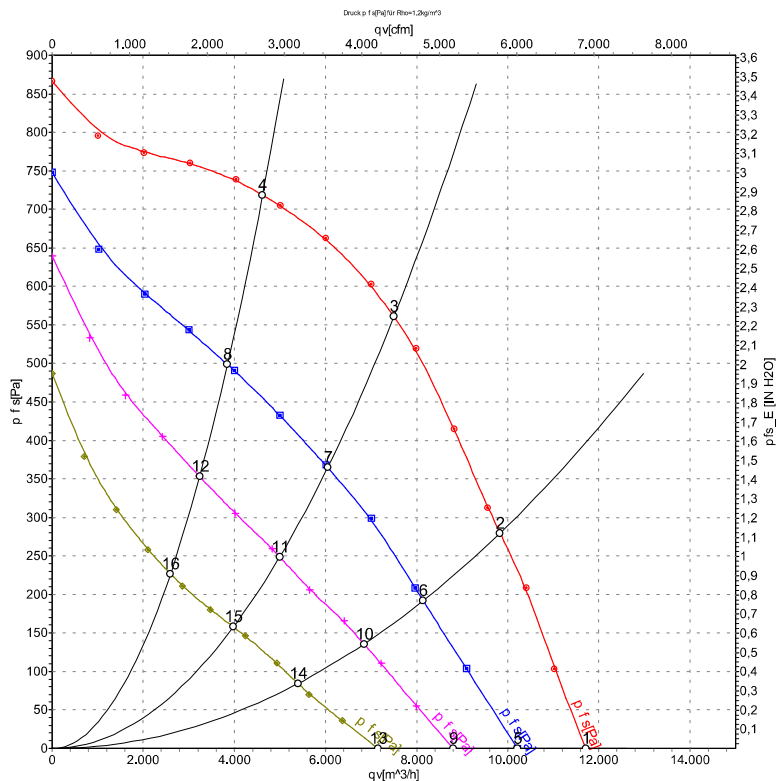

Measurement: LU-70083-1
Measurement: LU-70117-1
Measurement: LU-70119-1
Measurement: LU-70120-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	Y	400	50	1410	1724	4.22	11700	0	6885	0.00
2	Y	400	50	1380	2151	4.82	9830	280	5785	1.12
3	Y	400	50	1365	2380	5.00	7500	560	4415	2.25
4	Y	400	50	1385	2062	4.69	4620	720	2720	2.89
5	Y	230	50	1220	1326	4.15	10210	0	6010	0.00
6	Y	230	50	1140	1537	4.81	8145	192	4795	0.77
7	Y	230	50	1095	1640	5.12	6050	365	3560	1.47
8	Y	230	50	1150	1489	4.66	3850	499	2265	2.00
9	Y	180	50	1050	1037	4.21	8805	0	5180	0.00
10	Y	180	50	955	1136	4.69	6845	136	4030	0.55
11	Y	180	50	910	1184	4.88	4995	249	2940	1.00
12	Y	180	50	970	1112	4.57	3240	353	1905	1.42
13	Y	140	50	855	724	3.94	7150	0	4210	0.00
14	Y	140	50	765	768	4.22	5395	84	3175	0.34
15	Y	140	50	725	784	4.32	3980	158	2345	0.63
16	Y	140	50	780	756	4.15	2595	227	1530	0.91

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



ebm-papst