

KARTA KATALOGOWA

R4D560-RB03-01

Wentylator promieniowy AC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Zdjęcie poglądowe


Dane znamionowe	
Napięcie znamionowe	3~ 230 V Δ / 400 V Y
Częstotliwość	50/60 Hz
Prędkość obrotowa	1390 / 1560 obr/min
Pobór mocy	1950 / 2990 W
Pobór prądu	6,9 / 8,93 A (Δ) · 3,98 / 5,16 A (Y)
Maks. wydajność	12140 m³/h
Maks. ciśnienie statyczne	650 Pa
Temperatura otoczenia	-40...+60 °C (60 Hz: +40 °C)

Dane ErP (UE 327/2011)	
Sprawność całkowita	54,7 %
Przepływ w pkt. optymalnym	7125 m³/h
Przyrost ciśnienia	560 Pa
Regulacja obrotów	nie

Budowa	
Średnica wirnika	560 mm
Materiał wirnika	tworzywo PP
Liczba łopatek	6
Stopień ochrony	IP54
Zabezpieczenie silnika	termik (TOP)
Masa	26,2 kg

Charakterystyka przepływowa

Curves: Air performance 50 Hz

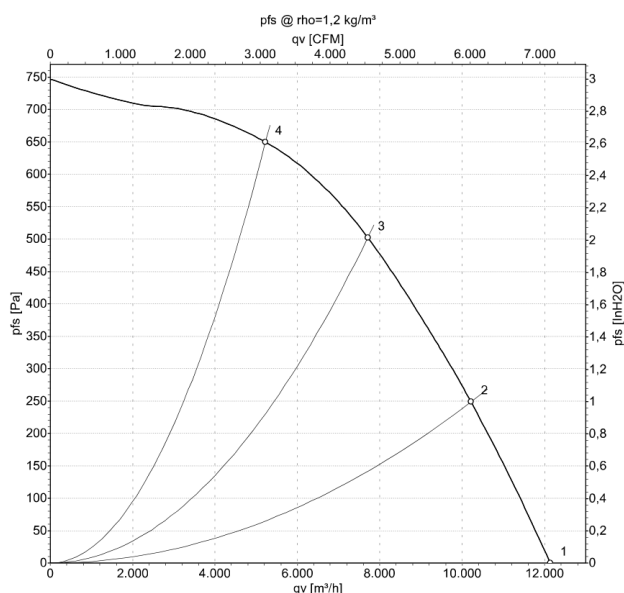

Measurement: LU-146857-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R4D560-RB03-01

AC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R4D560-RB03-01				
Motor	M4D138-LA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Wiring		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Method of obtaining data		ml	ml	ml	ml
Valid for approval/standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	1390	1560	1390	1560
Power consumption	W	1950	2990	1950	2990
Current draw	A	6.9	8.93	3.98	5.16
Min. back pressure	Pa	0	0	0	0
Min. back pressure	in. wg	0	0	0	0
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	60	40	60	40
Starting current	A	47	35	27	20

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	54.7	54.7	09 Power consumption P_e	kW	2.01
02 Measurement category		A		09 Air flow q_v	m ³ /h	7125
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	560
04 Efficiency grade N		62	62	10 Speed (rpm) n	min ⁻¹	1395
05 Variable speed drive		No		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

 * Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-204395

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings). The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again. The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).


ebmpapst

R4D560-RB03-01

AC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description

Weight	26.2 kg
Size	560 mm
Motor size	138
Rotor surface	Cast in aluminum
Impeller material	PP plastic
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	On rotor and stator sides
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1 (2010); UKCA; CE
Approval	EAC; VDE




R4D560-RB03-01

AC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

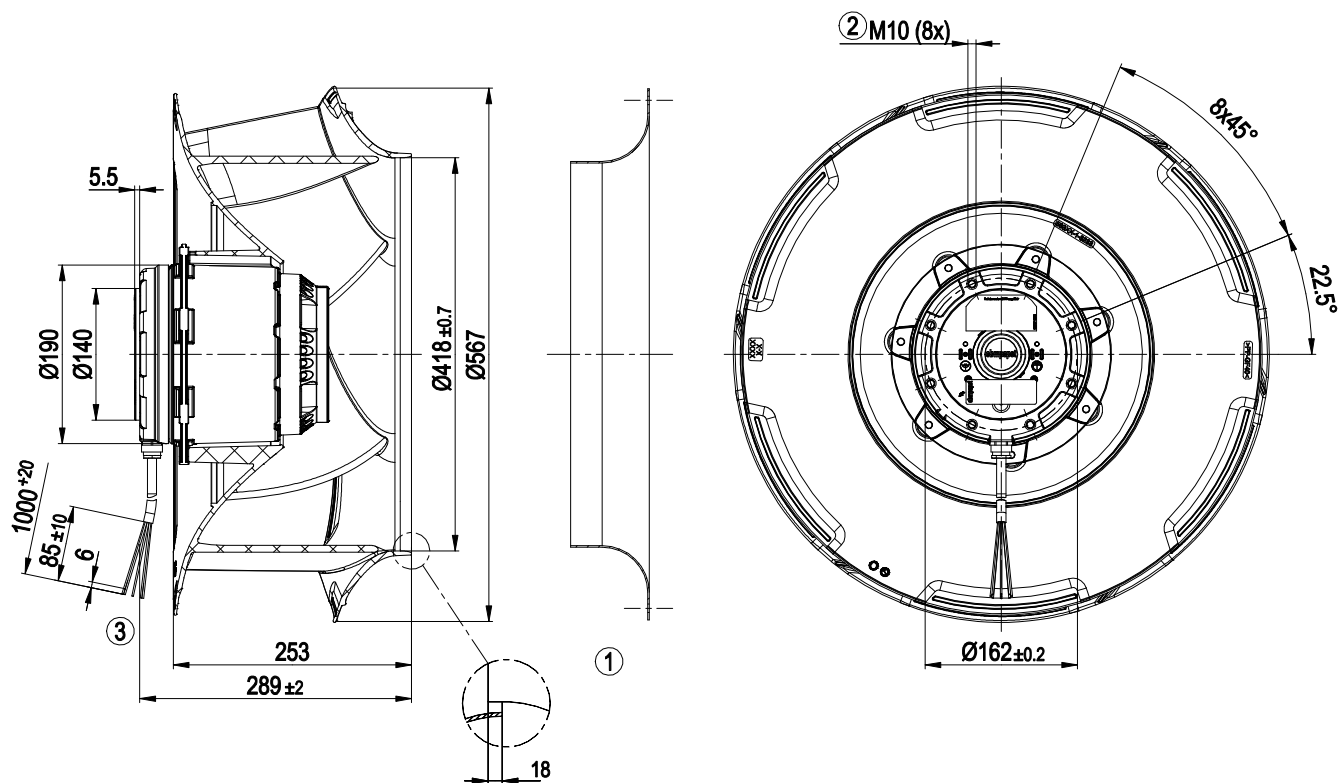


- | | |
|---|--|
| 1 | Accessory part: Inlet ring 54482-2-4013 not included in scope of delivery. |
| 2 | Max. clearance for screw 18 mm |
| 3 | Cable halogen-free 9x 0.75 mm ² , 9x crimped splices |

R4D560-RB03-01

AC centrifugal fan - RadiCal

backward-curved, single-intake

Accessory part

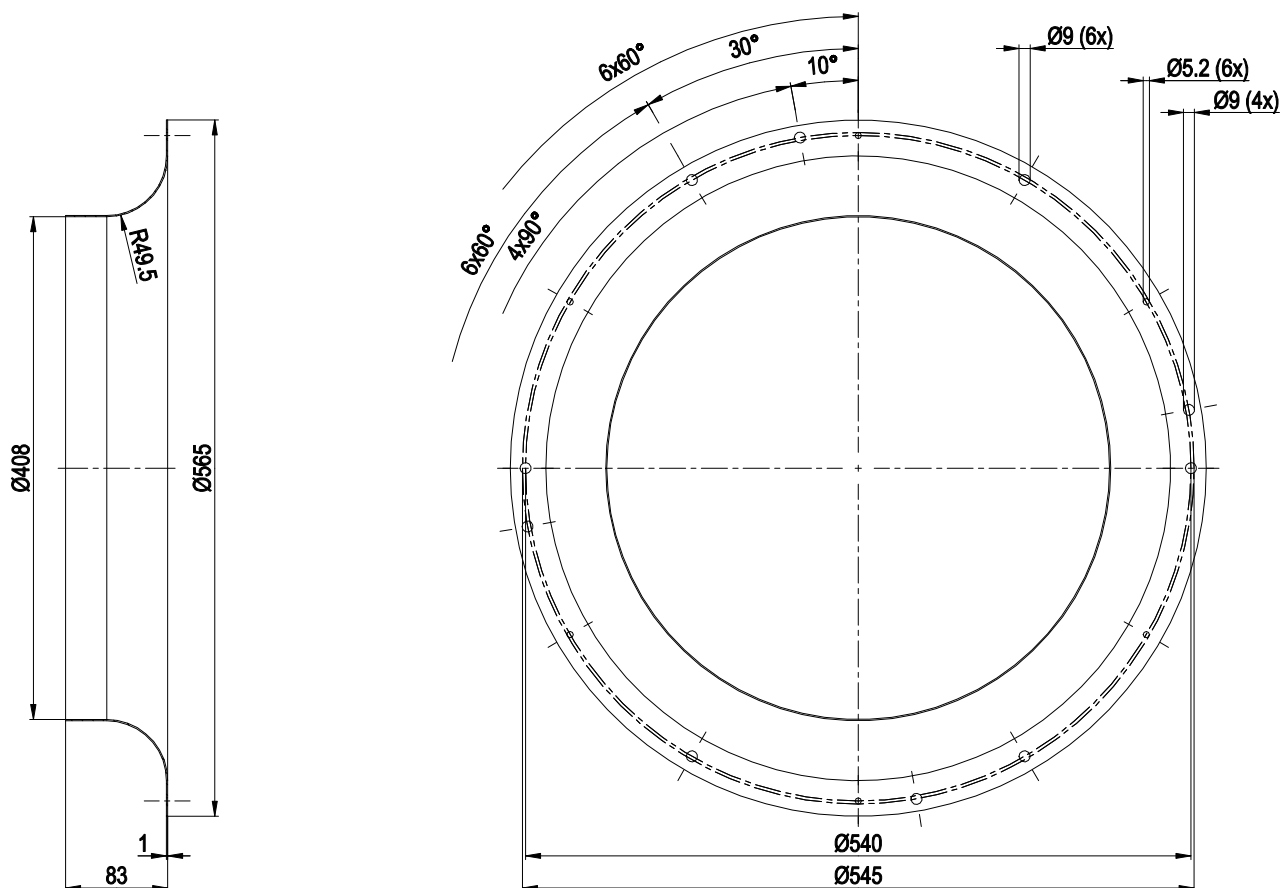


Inlet ring 54482-2-4013

R4D560-RB03-01

AC centrifugal fan - RadiCal

backward-curved, single-intake

Connection diagram

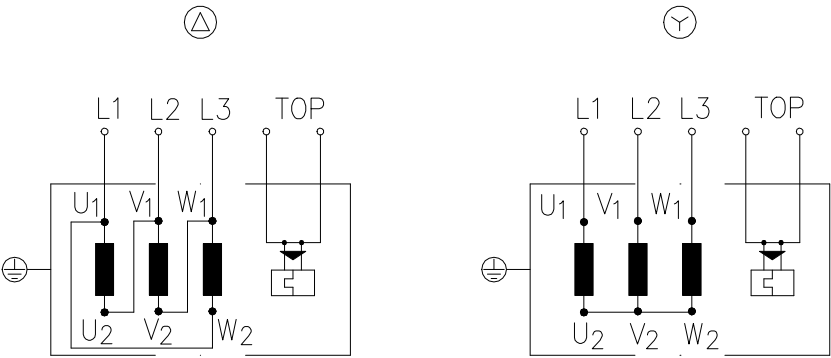

Change of rotation direction by reversing two phases

Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				




R4D560-RB03-01

AC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

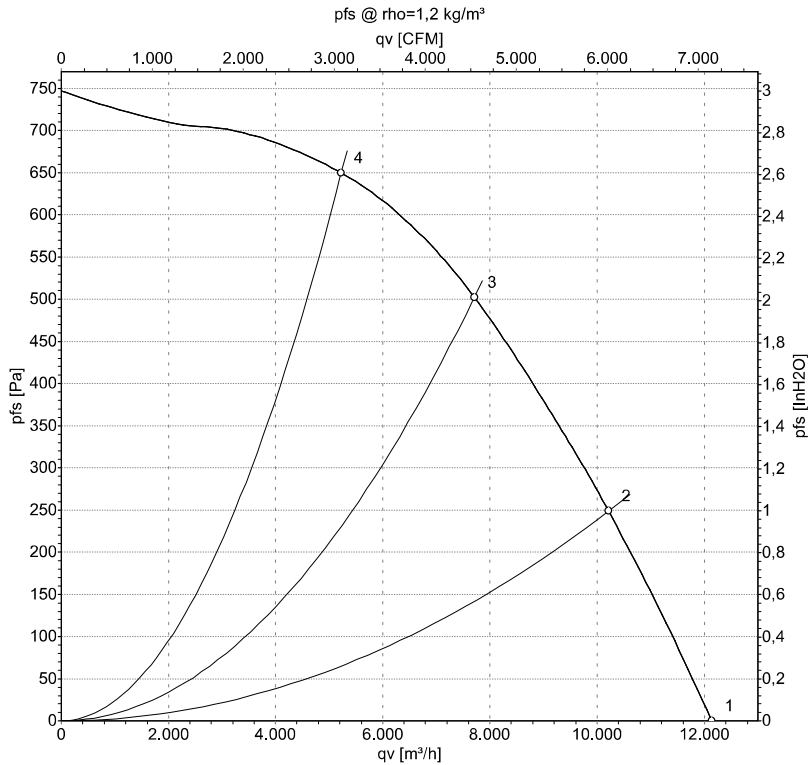

Measurement: LU-146857-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	Y	400	50	1425	1477	3.44	78	85	88	12140	0	7145	0.00
2	Y	400	50	1405	1782	3.77	74	81	84	10215	250	6010	1.00
3	Y	400	50	1390	1950	3.98	71	78	82	7705	500	4535	2.01
4	Y	400	50	1400	1849	3.84	72	79	83	5225	650	3075	2.61

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase




R4D560-RB03-01

AC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 60 Hz

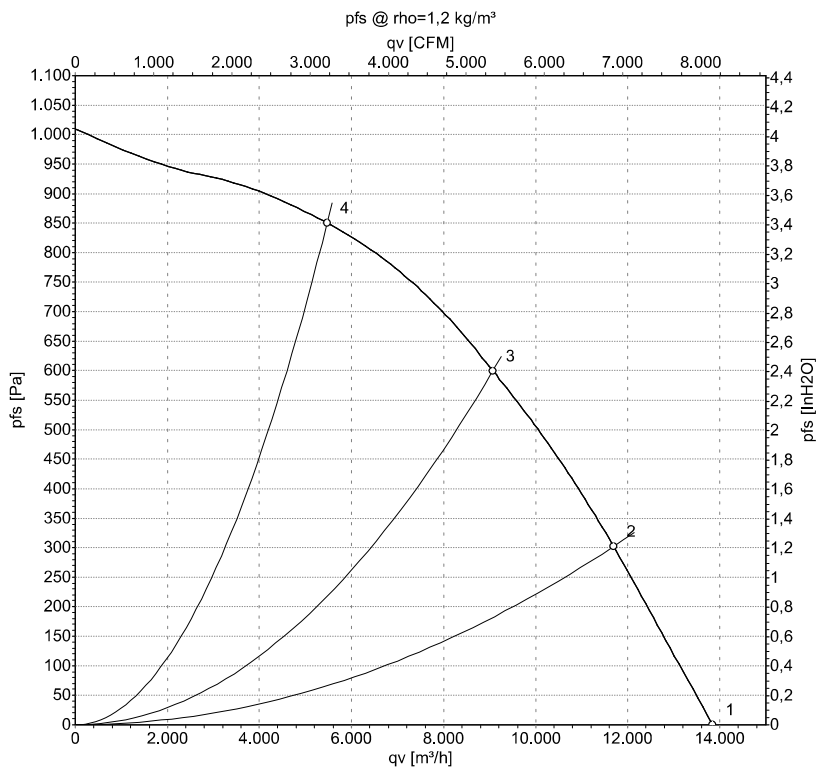

Measurement: LU-146869-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	Y	400	60	1635	2275	4.05	81	88	91	13845	0	8150	0.00
2	Y	400	60	1590	2730	4.75	77	84	88	11690	300	6880	1.20
3	Y	400	60	1560	2990	5.16	74	81	85	9070	600	5340	2.41
4	Y	400	60	1585	2783	4.81	76	83	87	5470	850	3220	3.41

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

