

KARTA KATALOGOWA

R4E310-AA16-14

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Średnica wirnika	310 mm
Częstotliwość	50 Hz	Materiał wirnika	tworzywo
Prędkość obrotowa	1400 obr/min	Liczba łopatek	6
Pobór mocy	132 W	Stopień ochrony	IP44
Pobór prądu	0,58 A	Klasa izolacji	B
Kondensator	5 µF / 400 V	Zabezpieczenie silnika	termik (TOP)
Maks. wydajność	1895 m³/h	Masa	3,4 kg
Maks. ciśnienie statyczne	210 Pa		

Charakterystyka przepływowa

Charts: Air flow 50 Hz

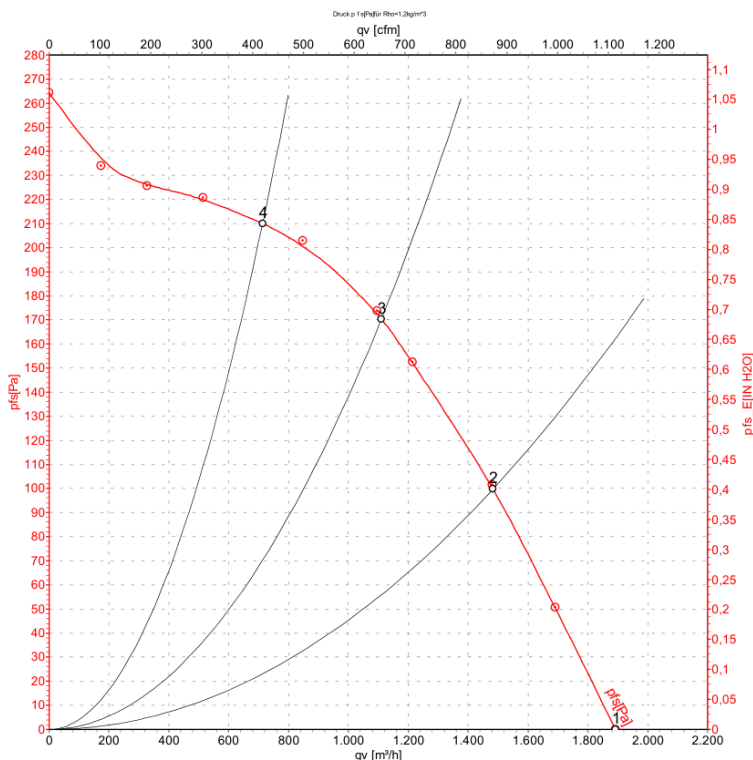

Measurement: LU-41525

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R4E310-AA16-14

AC centrifugal fan

backward curved, single inlet

Nominal data

Type	R4E310-AA16-14	
Motor	M4E068-EC	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Type of data definition		cu
Valid for approval / standard		-
Speed	min ⁻¹	1400
Power input	W	132
Current draw	A	0.58
Motor capacitor	µF	5
Capacitor voltage	VDB	400
Capacitor standard		P2 (CE)
Min. back pressure	Pa	-
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	-

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



R4E310-AA16-14

AC centrifugal fan

backward curved, single inlet

Technical features


Mass	3.4 kg
Size	310 mm
Surface of rotor	Coated in black
Material of impeller	Plastic PA6, fibreglass-reinforced
Number of blades	6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"B"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1



R4E310-AA16-14


AC centrifugal fan
backward curved, single inlet

Product drawing

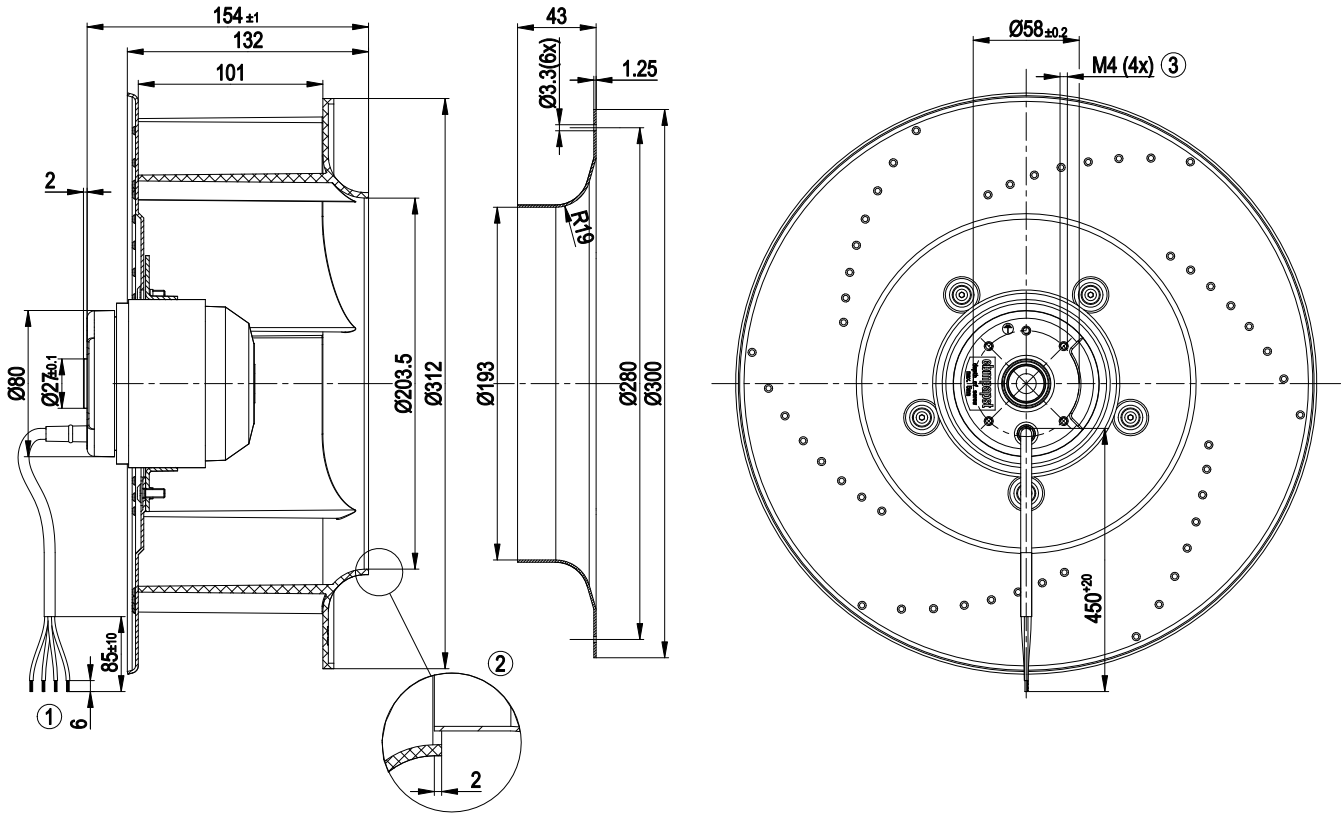

1	Connection line PVC 4G 0.5mm² 4x brass lead tips crimped
2	Accessory part: Inlet nozzle 09621-2-4013, not included in the standard scope of delivery.
3	Depth of screw max. 5 mm

Connection screen




U1	blue	Z	brown	U2	black
PE	green/yellow				



R4E310-AA16-14

AC centrifugal fan
backward curved, single inlet

Charts: Air flow 50 Hz

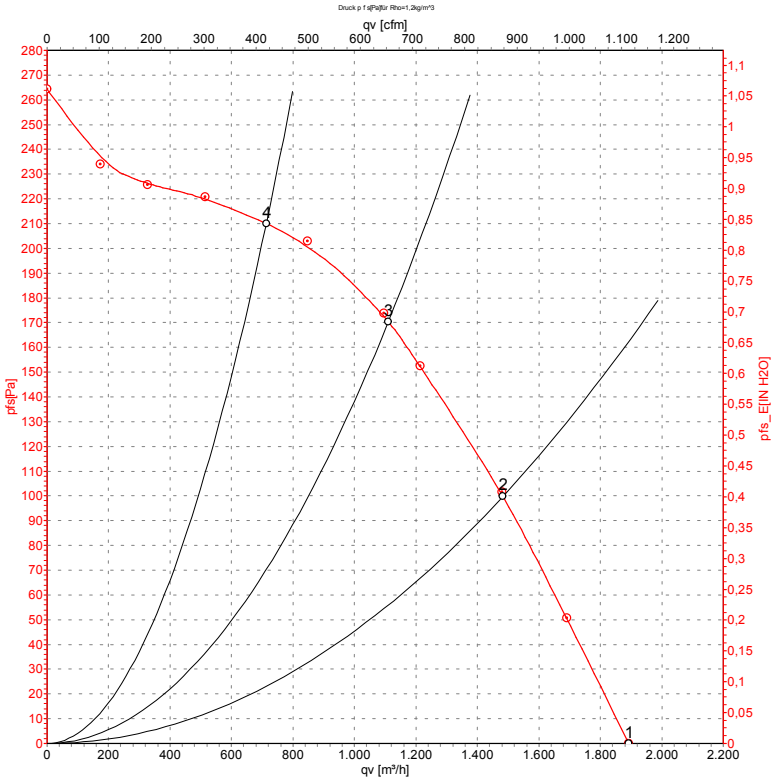

Measurement: LU-41525

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	230	50	1400	132	0.58	1895	0
2	230	50	1370	140	0.62	1485	100
3	230	50	1355	145	0.64	1110	170
4	230	50	1365	140	0.62	715	210

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

