

KARTA KATALOGOWA

R4E310-AE05-17

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe	
Napięcie znamionowe	1~ 230 V
Częstotliwość	60 Hz
Prędkość obrotowa	1680 obr/min
Pobór mocy	175 W
Pobór prądu	0,78 A
Kondensator	4 µF / 400 V
Maks. wydajność	1800 m³/h
Maks. ciśnienie statyczne	220 Pa
Temperatura otoczenia	-25...+50 °C

Budowa	
Wielkość	310 mm
Silnik	M4E074-EI
Materiał wirnika	tworzywo PA
Liczba łopatek	6
Kierunek obrotów	w prawo, patrząc na wirnik
Stopień ochrony	IP44
Klasa izolacji	B
Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Łożyskowanie	kulkowe
Masa	4,5 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

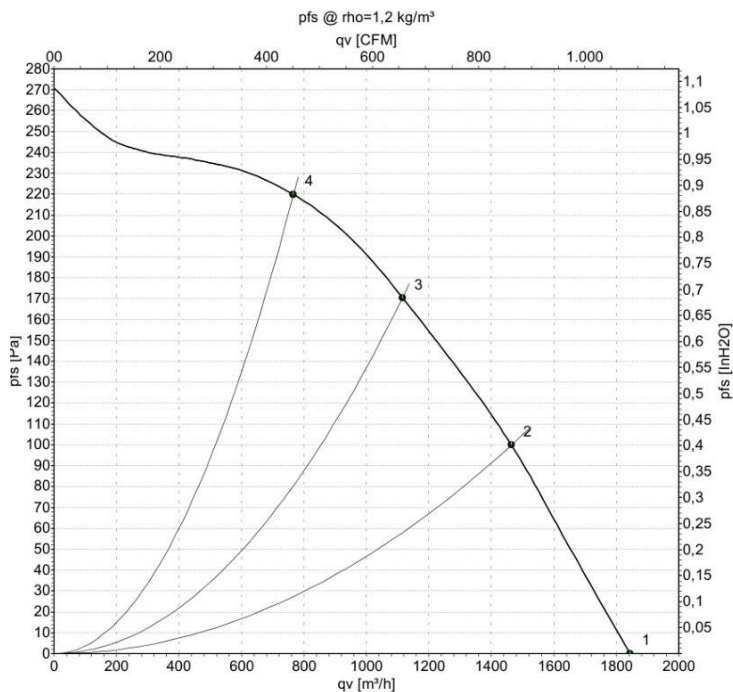

Measurement: LU-28203-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Wartości przy swobodnym wydmuchu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

 tel. +48 600 100 371 · tel. +48 604 959 199
 biuro@luftberg.pl · www.luftberg.pl

R4E310-AE05-17

AC centrifugal fan

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	R4E310-AE05-17	
Motor	M4E074-EI	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	60
Method of obtaining data		fa
Valid for approval/standard		UL 2111
Speed (rpm)	min ⁻¹	1680
Power consumption	W	175
Current draw	A	0.78
Capacitor	μF	4
Capacitor voltage	VDB	400
Capacitor standard		UL
Min. back pressure	Pa	0
Min. back pressure	inH2O	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R4E310-AE05-17

AC centrifugal fan

backward-curved, single-intake


Technical description

Weight	4.5 kg
Fan size	310 mm
Rotor surface	Painted black
Impeller material	PA plastic
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1
Approval	CCC; UL 2111; CSA C22.2 No. 77

R4E310-AE05-17


AC centrifugal fan
backward-curved, single-intake

Product drawing

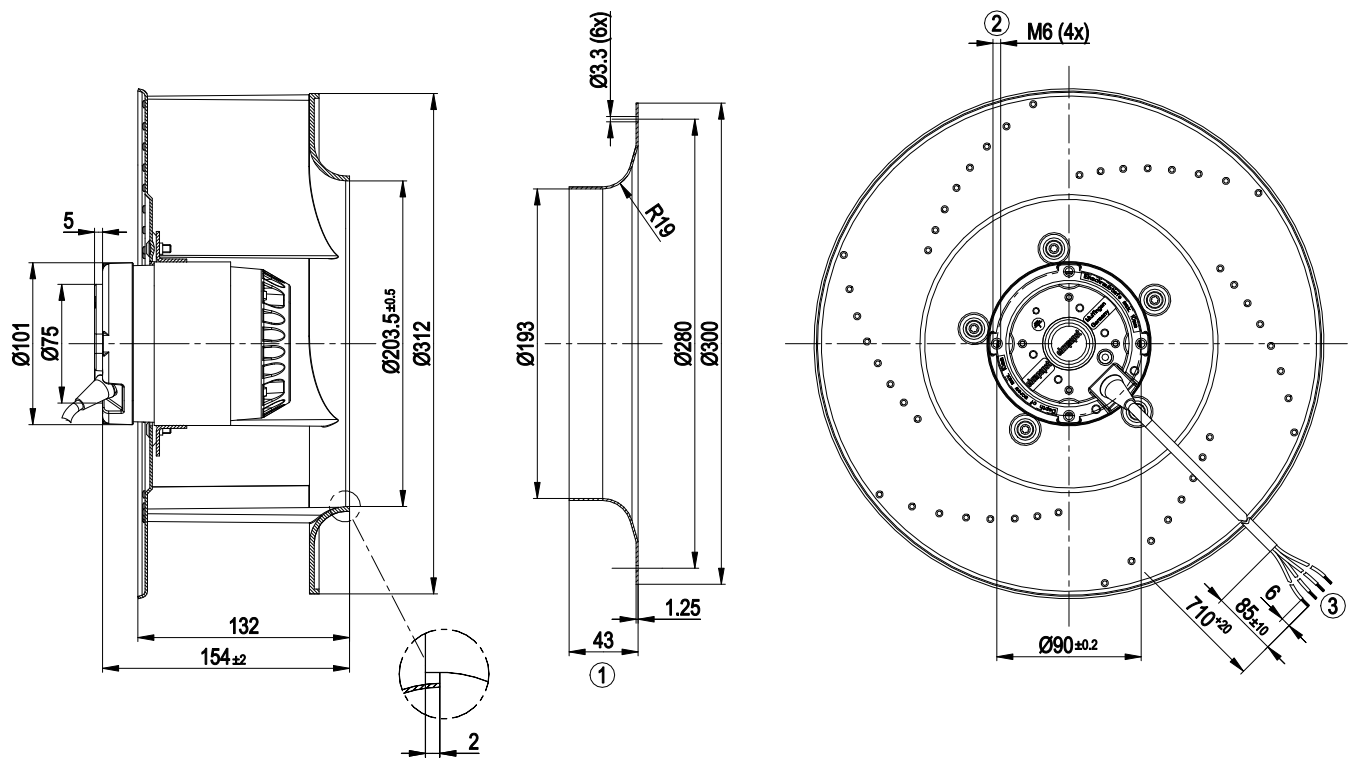

1	Accessory part: inlet ring 09621-2-4013 not included in scope of delivery
2	Max. clearance for screw 10 mm
3	Cable PVC 4G AWG20, 4x crimped splices

Connection diagram



U1	blue	Z	brown	U2	black
PE	green/yellow				




R4E310-AE05-17

AC centrifugal fan

backward-curved, single-intake

Curves: Air performance 50 Hz

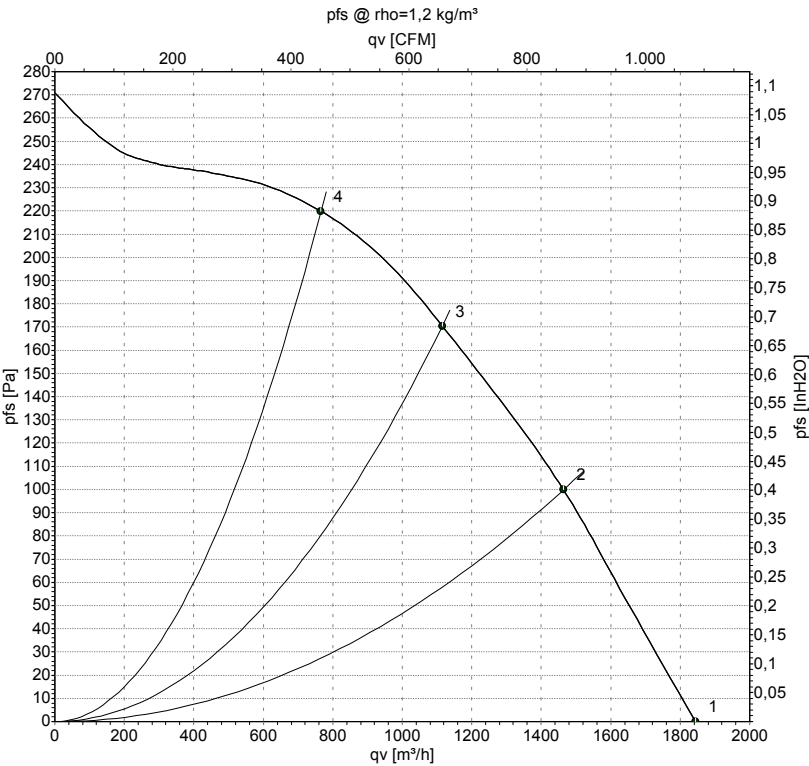

Measurement: LU-28203-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	230	50	1440	125	0.66	1845	0	1085	0.00
2	230	50	1415	140	0.71	1465	100	860	0.40
3	230	50	1415	143	0.72	1115	170	655	0.68
4	230	50	1415	141	0.71	765	220	450	0.88


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



R4E310-AE05-17

AC centrifugal fan
backward-curved, single-intake

Curves: Air performance 60 Hz

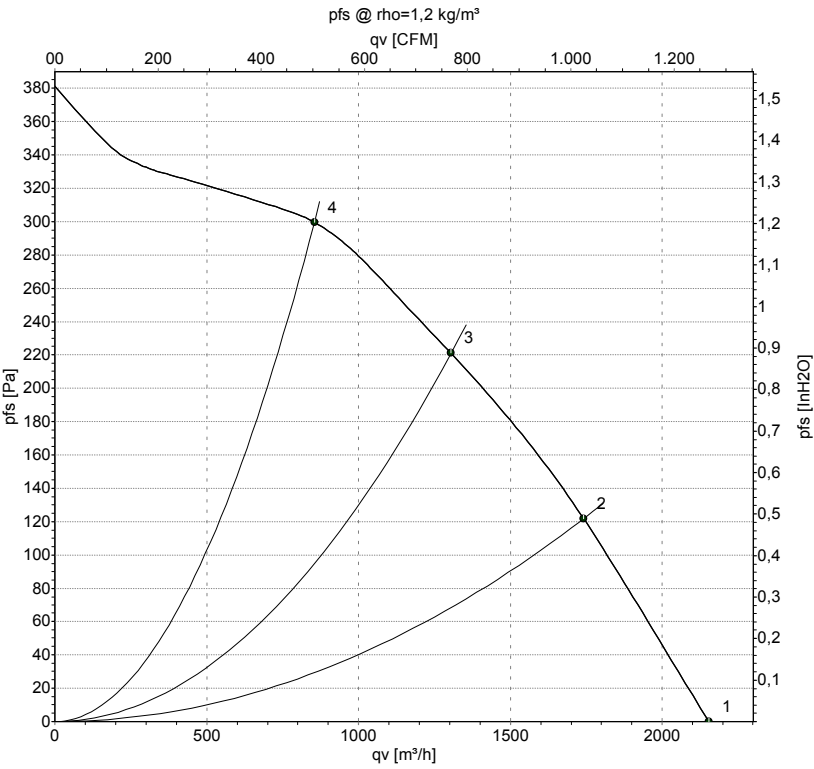

Measurement: LU-28204-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	230	60	1680	165	0.73	2155	0	1265	0.00
2	230	60	1635	187	0.82	1740	120	1025	0.48
3	230	60	1625	192	0.84	1305	220	770	0.88
4	230	60	1630	191	0.84	855	300	505	1.20

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

