

KARTA KATALOGOWA

R4E310-AE13-16

Wentylator promieniowy AC, łopatki zakrzywione do tyłu

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 115 V	Wielkość	310 mm
Częstotliwość	60 Hz	Silnik	M4E074-EI
Prędkość obrotowa	1670 obr/min	Materiał wirnika	tworzywo PA
Pobór mocy	160 W	Liczba łopatek	6
Pobór prądu	1,35 A	Kierunek obrotów	w prawo, patrząc na wirnik
Prąd rozruchowy	3,5 A	Stopień ochrony	IP44
Kondensator	12 µF / 220 V	Klasa izolacji	B
Maks. wydajność	2100 m³/h	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Maks. ciśnienie statyczne	280 Pa	Łożyskowanie	kulkowe
Temperatura otoczenia	-25...+50 °C	Masa	4,5 kg

Charakterystyka przepływowa (60 Hz)

Curves: Air performance 60 Hz

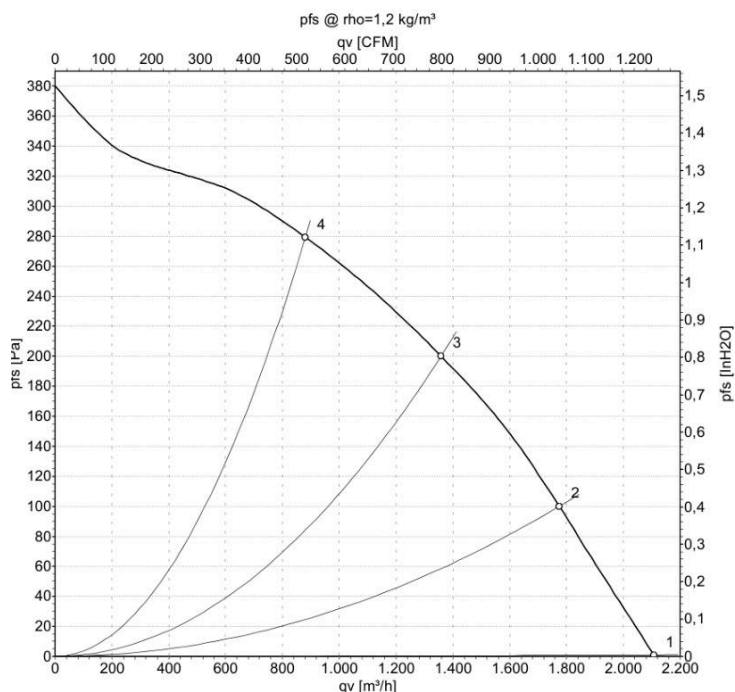

Measurement: LU-27839-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Wartości przy swobodnym wydmuchu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

 tel. +48 600 100 371 · tel. +48 604 959 199
 biuro@luftberg.pl · www.luftberg.pl

R4E310-AE13-16

AC centrifugal fan
backward-curved

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R4E310-AE13-16	
Motor	M4E074-EI	
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	60
Method of obtaining data		fa
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	1670
Power consumption	W	160
Current draw	A	1.35
Capacitor	µF	12
Capacitor voltage	VDB	220
Capacitor standard		UL
Min. back pressure	Pa	0
Min. back pressure	inH2O	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50
Starting current	A	3.5

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R4E310-AE13-16

AC centrifugal fan

backward-curved


Technical description

Weight	4.5 kg
Fan size	310 mm
Rotor surface	Painted black
Impeller material	PA plastic
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	UL 1004-1; CSA C22.2 No. 100; CCC

R4E310-AE13-16


AC centrifugal fan
backward-curved

Product drawing

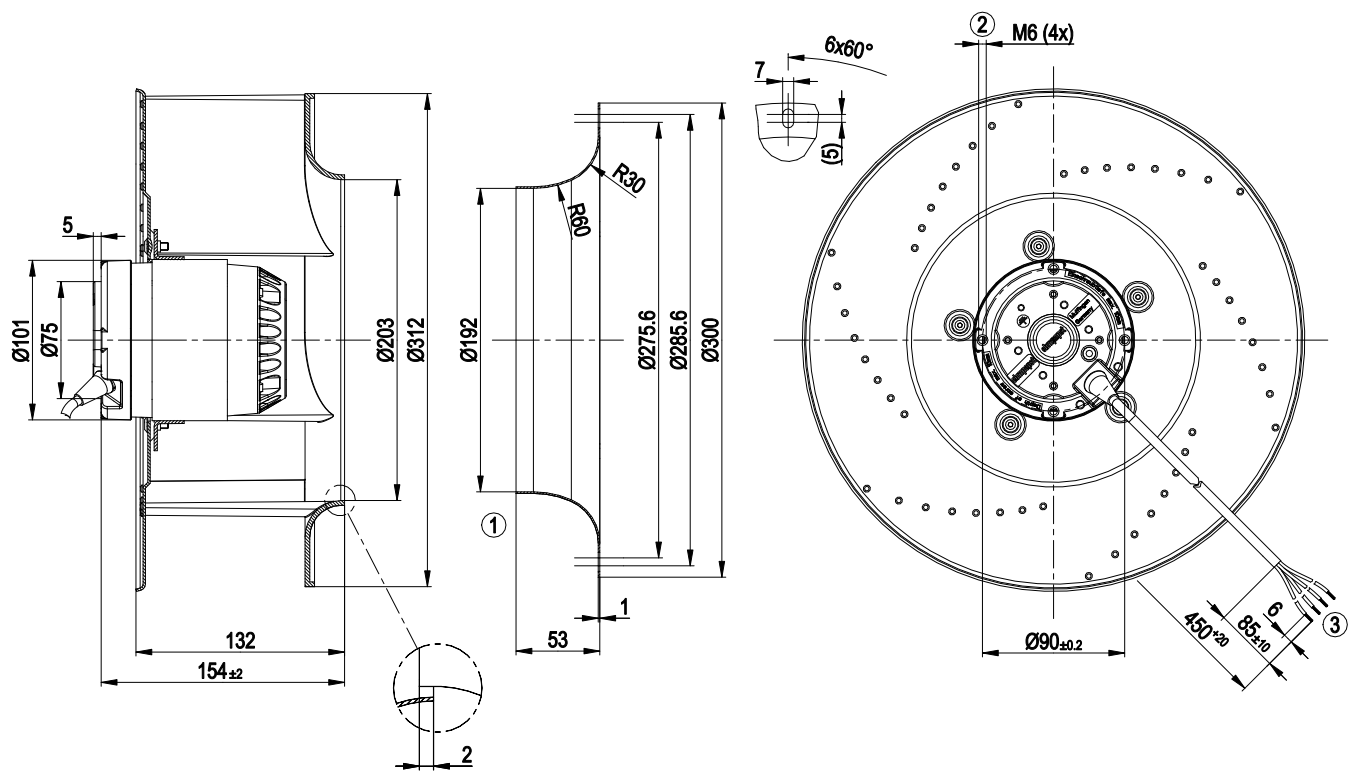

1	Accessory part: inlet ring 97512-2-4013 not included in scope of delivery
2	Max. clearance for screw 10 mm
3	Cable PVC 4G AWG20, 4x crimped splices

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				



R4E310-AE13-16

AC centrifugal fan
backward-curved

Curves: Air performance 60 Hz

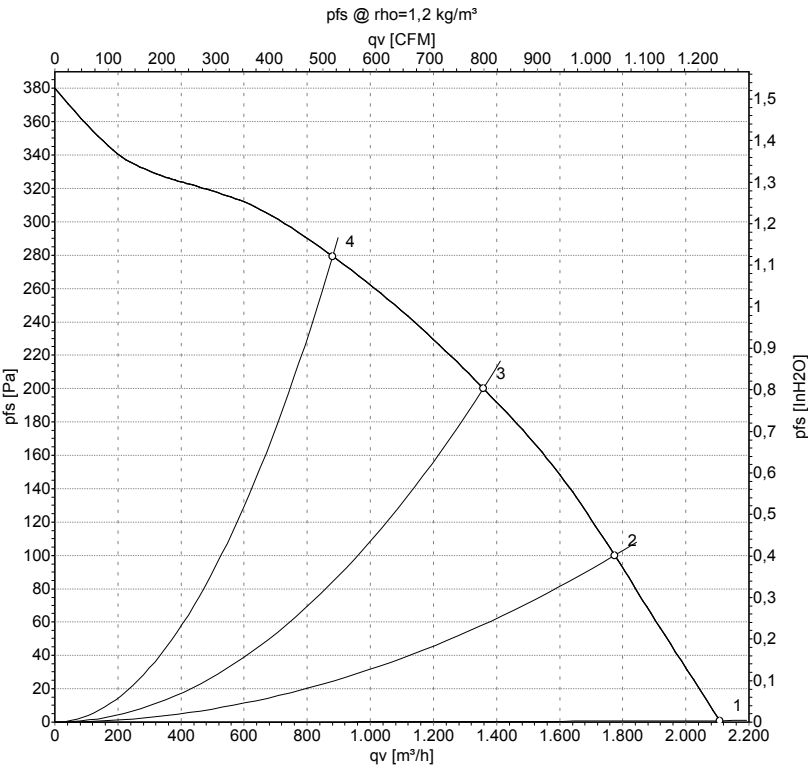

Measurement: LU-27839-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	115	60	1670	160	1.35	2110	0	1240	0.00
2	115	60	1635	173	1.54	1775	100	1045	0.40
3	115	60	1615	183	1.63	1360	200	800	0.80
4	115	60	1620	180	1.61	880	280	520	1.12

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

