

KARTA KATALOGOWA

R4E310-AS06-01

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Dane znamionowe


Napięcie znamionowe	1~ 230 V
Częstotliwość	50/60 Hz
Prędkość obrotowa	1370 / 1530 obr/min
Pobór mocy	120 / 160 W
Pobór prądu	0,54 / 0,71 A
Kondensator	4 µF / 400 V
Maks. wydajność	2120 m³/h
Maks. ciśnienie statyczne	220 Pa
Maks. temp. otoczenia	+85 °C (50 Hz) / +50 °C (60 Hz)

Budowa

Średnica wirnika	310 mm
Materiał wirnika	blacha aluminiowa
Liczba łopatek	6
Stopień ochrony	IP44
Klasa izolacji	F
Zabezpieczenie silnika	termik (TOP)
Masa	3,4 kg

Charakterystyka przepływowa

Charts: Air flow 50 Hz

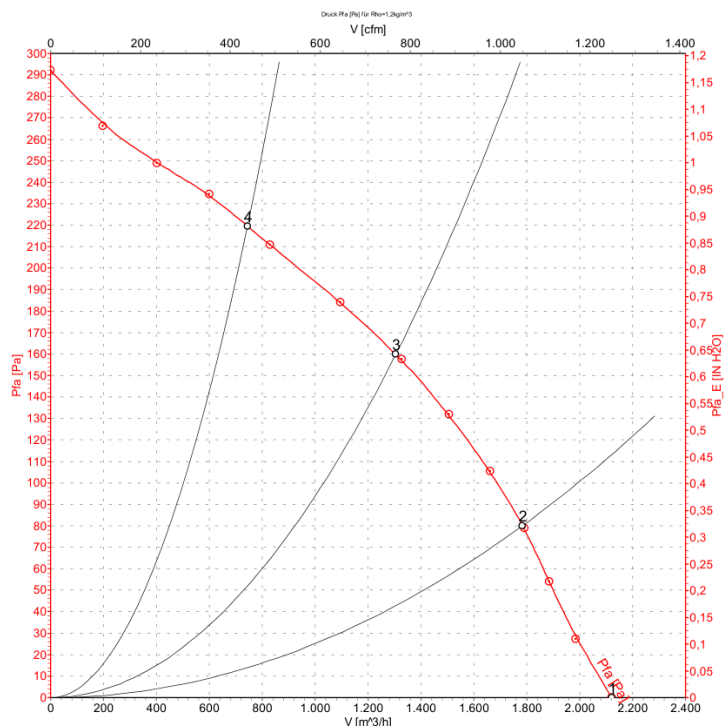

Measurement: LU-106606

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R4E310-AS06-01

AC centrifugal fan

backward curved, single inlet


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2

D-74673 Mulfingen

Phone: +49(0)7938/81-0

Fax: +49(0)7938/81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	R4E310-AS06-01		
Motor	M4E068-EC		
Phase		1~	1~
Nominal voltage	[V]	230	230
Frequency	[Hz]	50	60
Type of data definition		rfa	rfa
Valid for approval / standard		CE	CE
Speed	[min ⁻¹]	1370	1530
Power input	[W]	120	160
Current draw	[A]	0.54	0.71
Motor capacitor	[µF]	4	4
Capacitor voltage	[VDB]	400	400
Capacitor standard		P0 (CE)	P0 (CE)
Min. back pressure	[Pa]	0	0
Max. ambient temperature	[°C]	85	50

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

R4E310-AS06-01

AC centrifugal fan

backward curved, single inlet

Technical features


Leakage current	< 0.75 mA
Size	310 mm
Operation mode	S1
Direction of rotation	Clockwise, seen on rotor
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Humidity class	F1-2
Insulation class	"F"
Cable exit	Axial
Condensate discharge holes	Rotor-side
Bearing motor	Ball bearing
Mass	3.4 kg
Material of impeller	Aluminum sheet, laser-welded
Motor protection	Thermal overload protector (TOP) wired internally
Product conforming to standard	CE
Surface of rotor	Coated in black
Number of blades	6
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Protection class	I
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Approval	CCC

R4E310-AS06-01

AC centrifugal fan


backward curved, single inlet

Product drawing

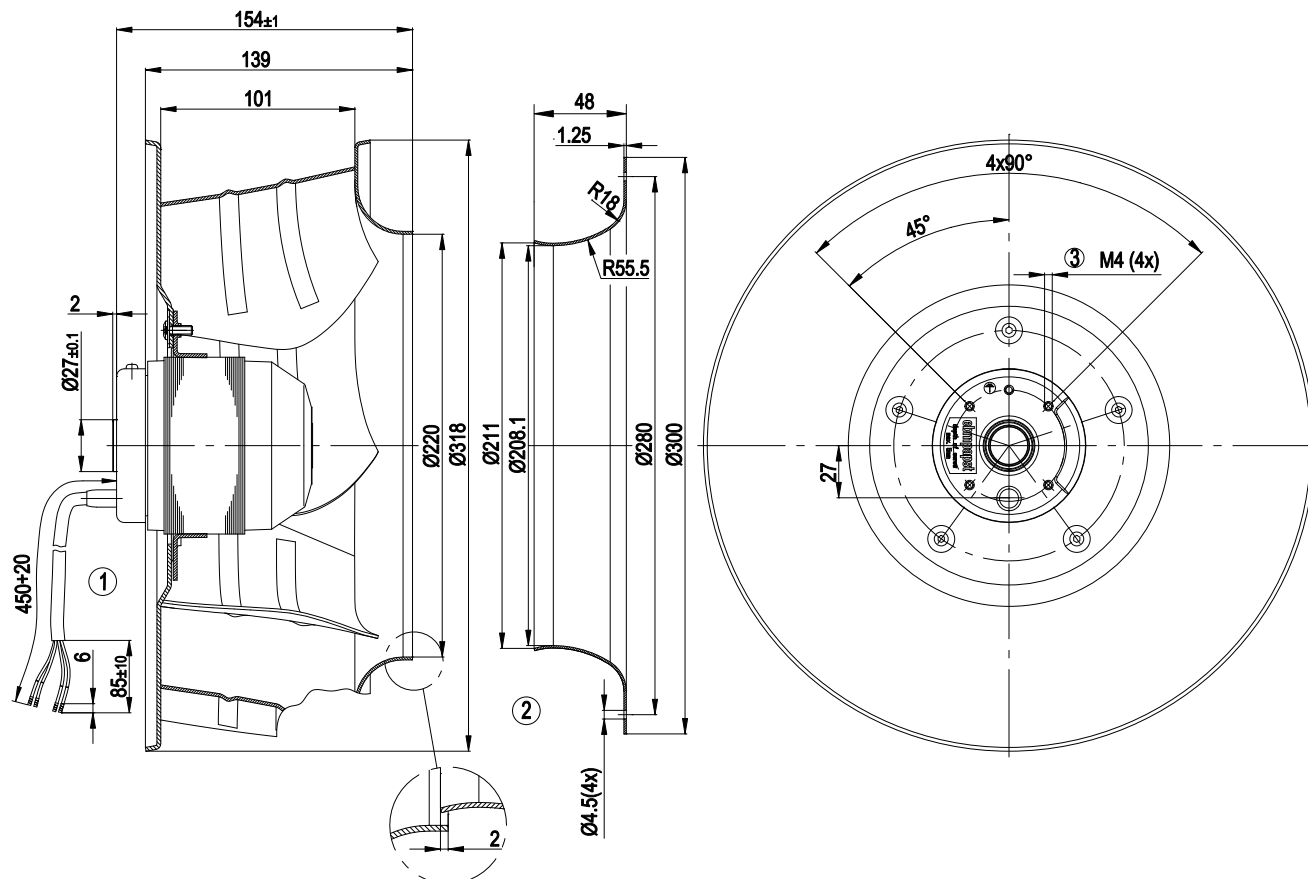

- | | |
|---|--|
| 1 | Connection line silicone 4G 0.5mm ² , 4x brass lead tips |
| 2 | Accessory part: Inlet nozzle 31050-2-4013, not included in the standard scope of delivery. |
| 3 | Depth of screw max. 5 mm |

Connection screen

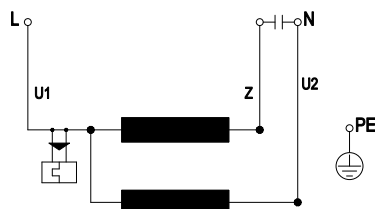


U1	blue	Z	brown	U2	black
PE	green/yellow				

R4E310-AS06-01

AC centrifugal fan

backward curved, single inlet

Charts: Air flow 50 Hz

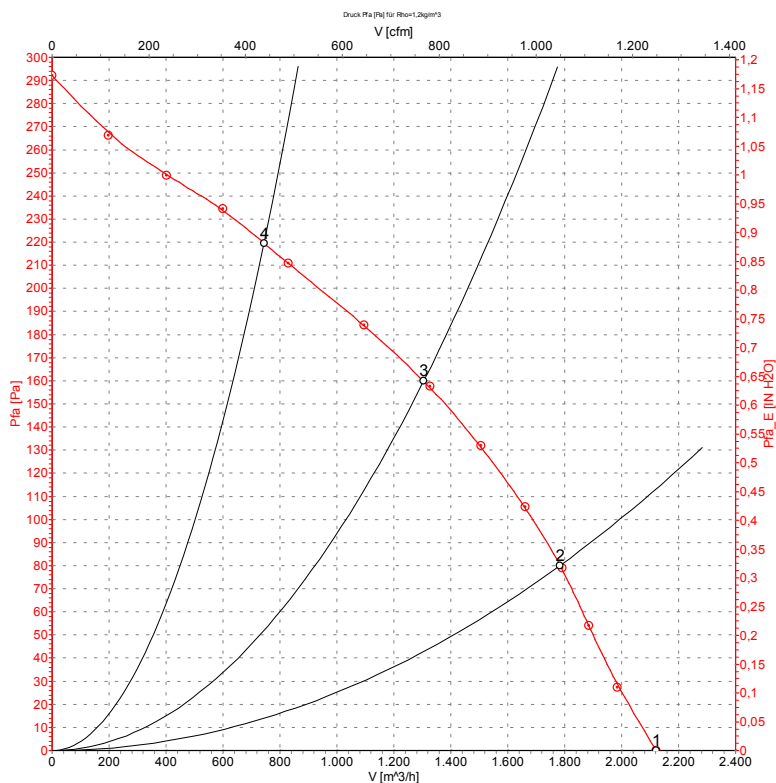

Measurement: LU-106606

Measured values


	U	f	n	P_1	I	$\dot{V}$	P_{fa}
	[V]	[Hz]	[min ⁻¹]	[W]	[A]	[m³/h]	[Pa]
1	230	50	1370	120	0.54	2120	0
2	230	50	1355	127	0.58	1785	80
3	230	50	1315	142	0.65	1305	160
4	230	50	1340	132	0.60	745	220

R4E310-AS06-01

AC centrifugal fan

backward curved, single inlet

Charts: Air flow 60 Hz

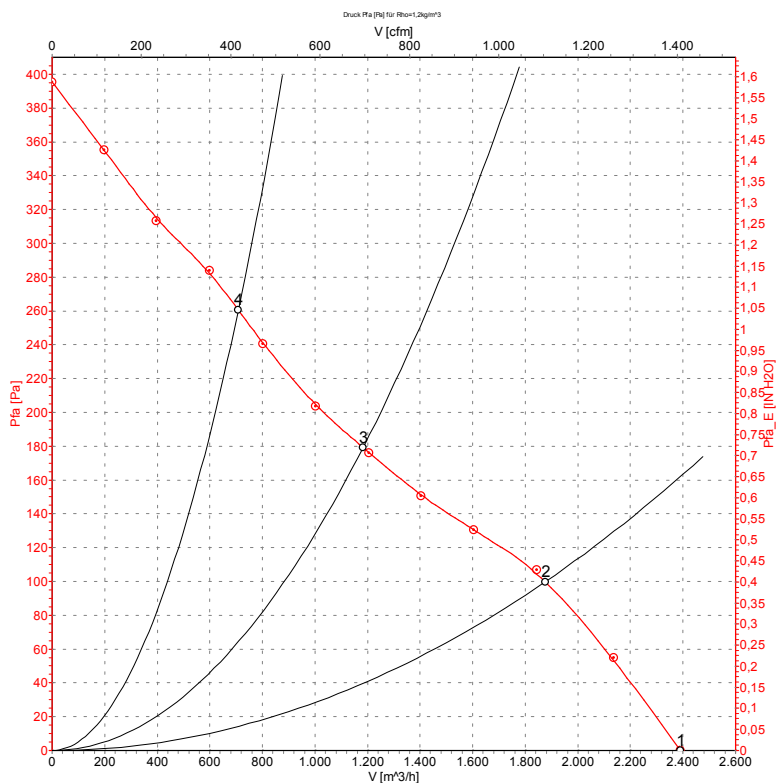

Measurement: LU-106607

Measured values

	U	f	n	P_1	I	$\dot{V}$	P_{fa}
	[V]	[Hz]	[min ⁻¹]	[W]	[A]	[m³/h]	[Pa]
1	230	60	1530	160	0.71	2390	0
2	230	60	1440	177	0.78	1875	100
3	230	60	1325	192	0.85	1185	180
4	230	60	1440	176	0.77	710	260