

KARTA KATALOGOWA

R4E310-RA06-09

Wentylator promieniowy AC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Średnica wirnika	310 mm
Częstotliwość	50/60 Hz	Materiał wirnika	tworzywo PP
Prędkość obrotowa	1325 / 1380 obr/min	Liczba łopatek	6
Pobór mocy	137 / 185 W	Stopień ochrony	IP44
Pobór prądu	0,62 / 0,82 A	Klasa izolacji	B
Maks. wydajność	2050 m³/h	Masa	3,4 kg
Maks. ciśnienie statyczne	230 Pa		
Temperatura otoczenia	-25...+60 °C (60 Hz: +40 °C)		

Charakterystyka przepływowa

Curves: Air performance 50 Hz

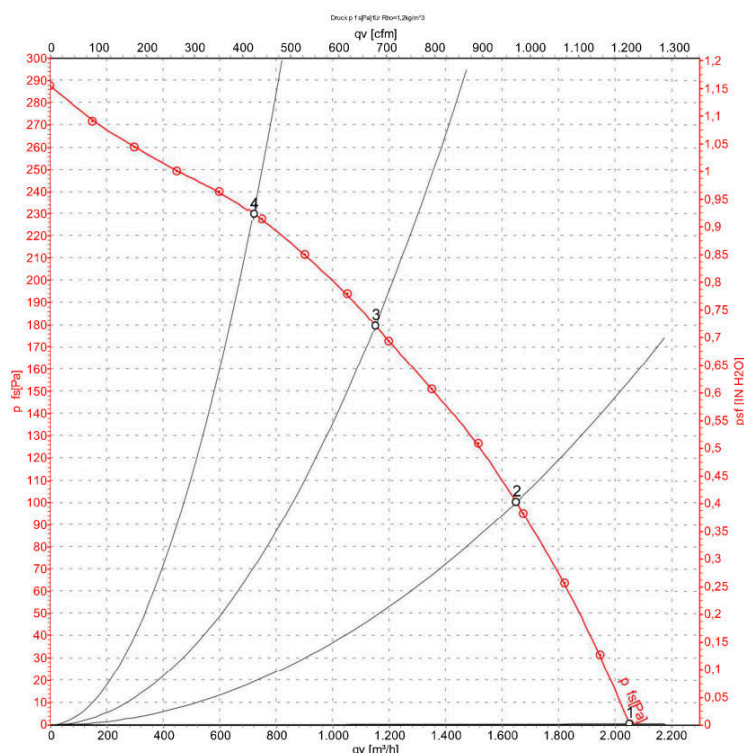

Measurement: LU-136581-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R4E310-RA06-09

AC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R4E310-RA06-09		
Motor	M4E068-EC		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		-	-
Speed (rpm)	min ⁻¹	1325	1380
Power consumption	W	137	185
Current draw	A	0.62	0.82
Capacitor	µF	4	4
Capacitor voltage	VDB	400	400
Capacitor standard		S0 (CE)	S0 (CE)
Min. back pressure	Pa	0	0
Min. back pressure	in. wg	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	60	40
Starting current	A	1.23	1.12

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R4E310-RA06-09

AC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description

Weight	3.4 kg
Size	310 mm
Motor size	68
Rotor surface	Painted black
Impeller material	PP plastic
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Temperature limiter manual reset
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1
Comment on CE	Commissioning not permitted in the European Economic Area




R4E310-RA06-09

AC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

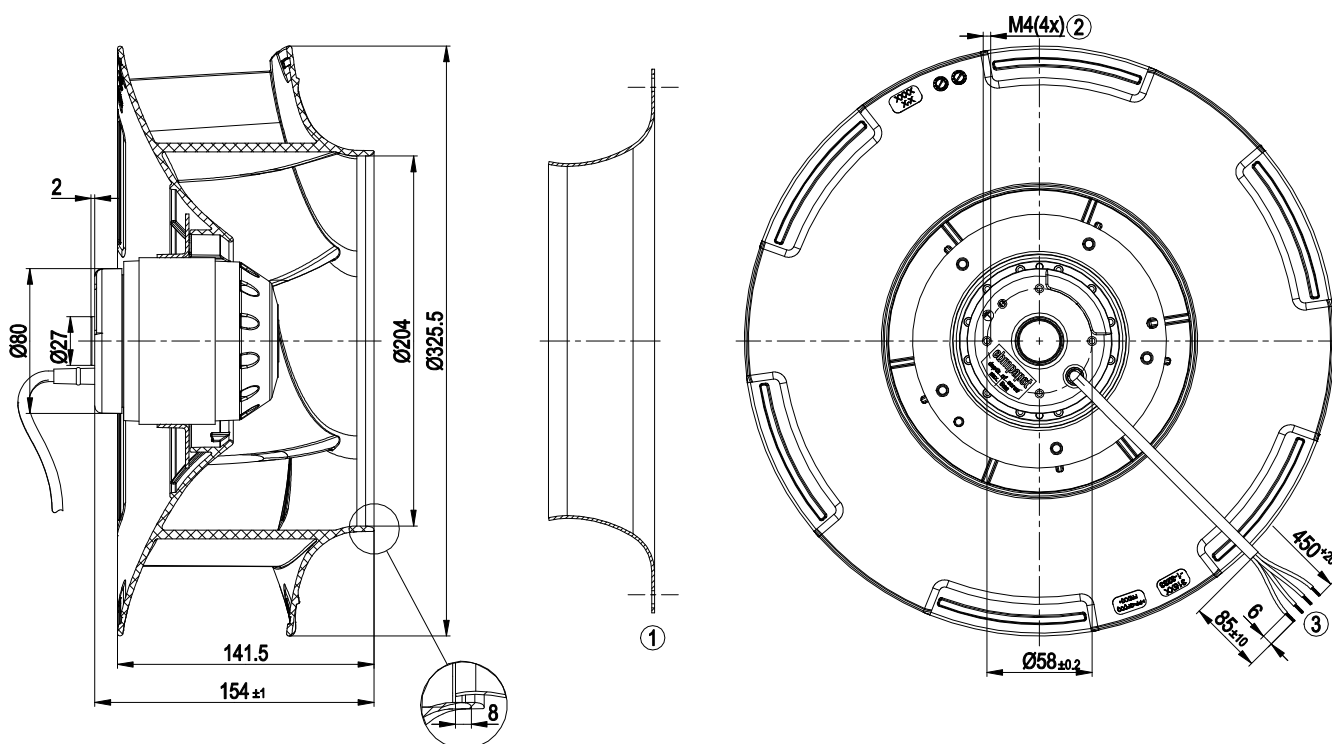


- | | |
|---|---|
| 1 | Accessory part: Inlet ring 31000-2-4013, not included in scope of delivery. |
| 2 | Max. clearance for screw 5 mm |
| 3 | Cable PVC 4G 0.5 mm ² , 4x crimped splices |

R4E310-RA06-09

AC centrifugal fan - RadiCal


backward-curved, single-intake

Accessory part

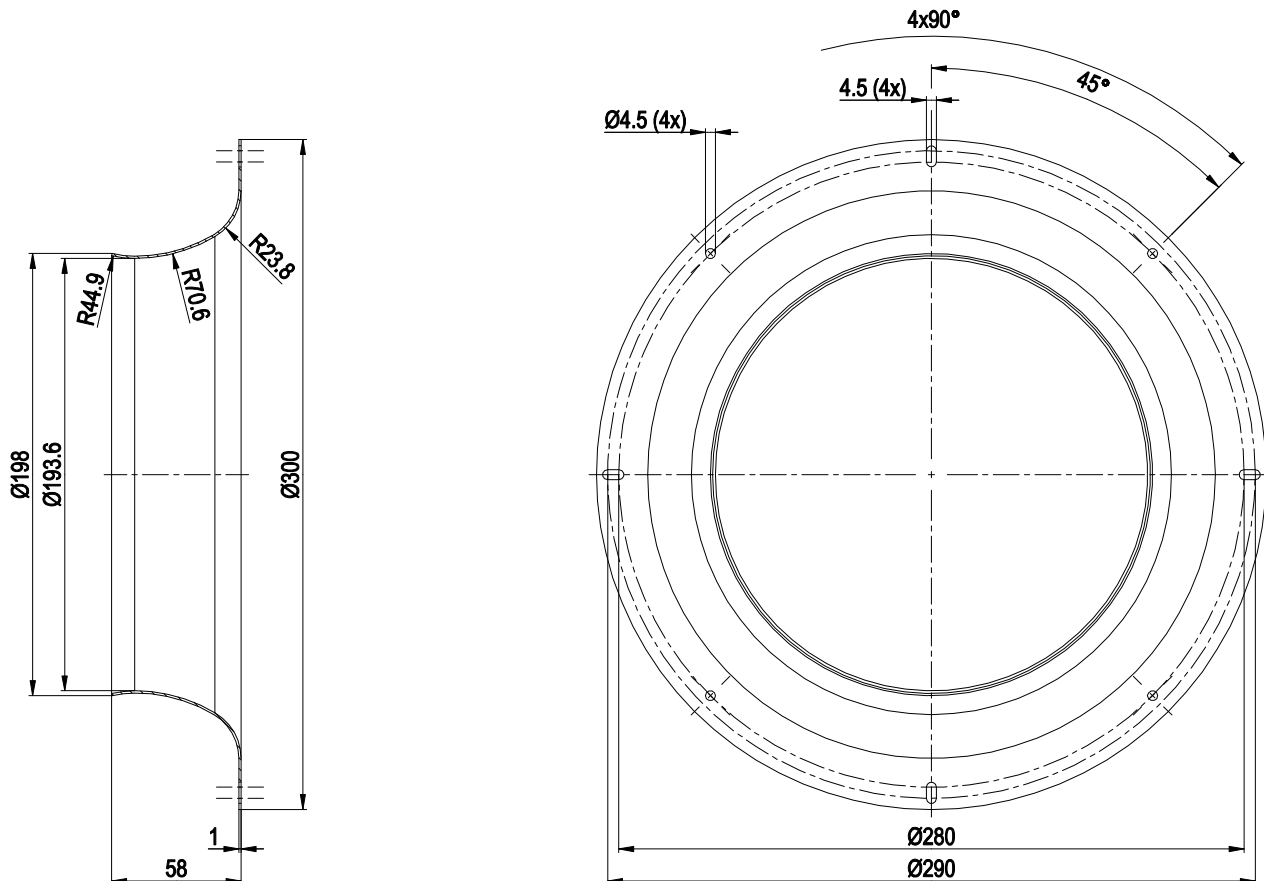

Inlet ring 31000-2-4013

Connection diagram



U1	blue	Z	brown	U2	black
PE	green/yellow				




R4E310-RA06-09

AC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

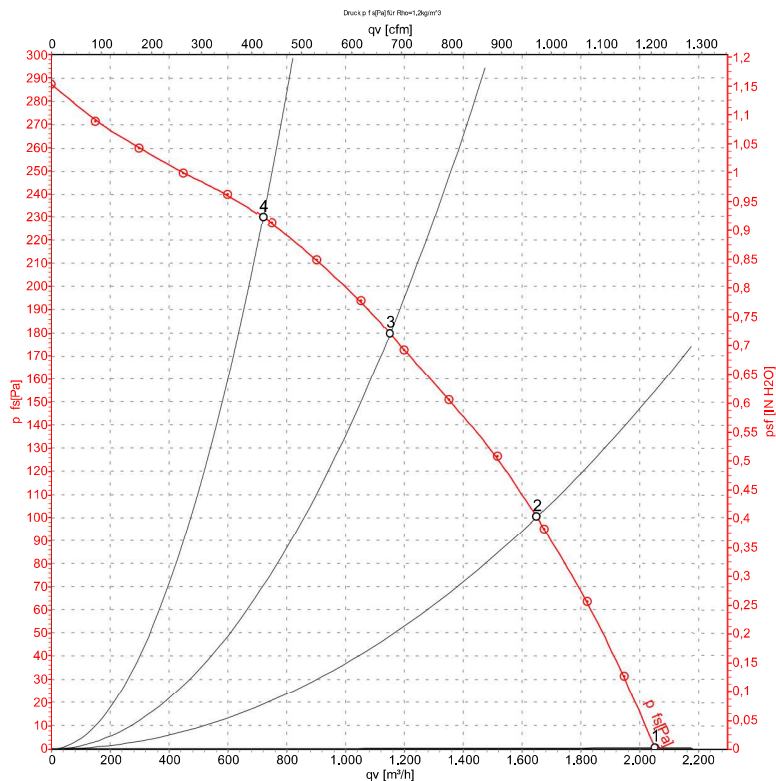

Measurement: LU-136581-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	1390	109	0.50	58	66	2050	0	1205	0.00
2	230	50	1345	129	0.58	53	60	1650	100	970	0.40
3	230	50	1325	137	0.62	49	56	1150	180	675	0.72
4	230	50	1355	125	0.57	51	58	720	230	425	0.92

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase




R4E310-RA06-09

AC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 60 Hz

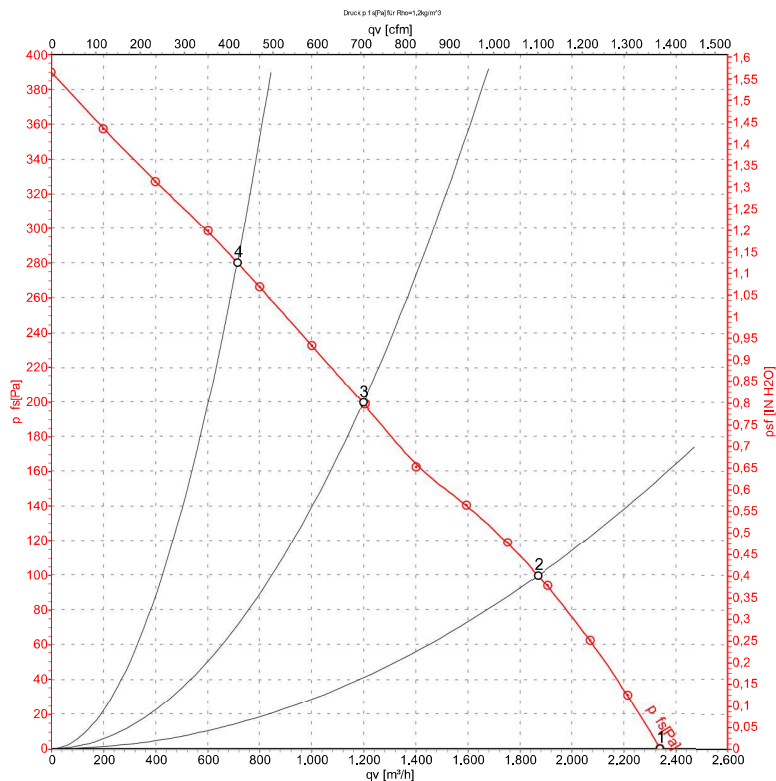

Measurement: LU-136587-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{ts}	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	60	1580	148	0.64	62	69	2340	0	1375	0.00
2	230	60	1470	174	0.76	56	64	1870	100	1100	0.40
3	230	60	1380	185	0.82	52	61	1195	200	705	0.80
4	230	60	1490	168	0.73	55	63	715	280	420	1.12

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{ts} = Pressure increase

