

KARTA KATALOGOWA

W1G200-EC87-20

Wentylator osiowy EC ESM, łopatki sierpowe (seria S), obudowa ESM

Producent: ebm-papst



Dane znamionowe


Napięcie znamionowe	1~ 230 V
Częstotliwość	50/60 Hz
Prędkość obrotowa	1300 / 900 obr/min
Pobór mocy	8 W
Pobór prądu	0,07 A
Maks. przeciwnieśnienie	23 Pa
Temperatura otoczenia	-30...+50 °C

Budowa

Wielkość	200 mm
Silnik	M1G055-BD
Materiał wirnika	tworzywo PA
Obudowa	tworzywo PP
Liczba łopatek	5
Kierunek obrotów	w lewo, patrząc na wirnik
Stopień ochrony	IP54
Klasa izolacji	B
Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Łożyskowanie	kulkowe
Masa	1 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

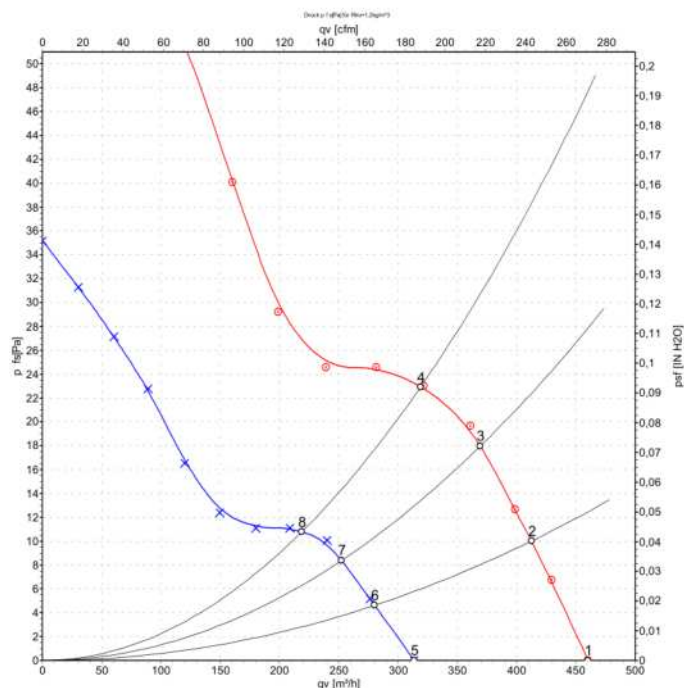

Measurement: LU-113354-1
Measurement: LU-113366-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

W1G200-EC87-20

EC axial fan - ESM

sickle-shaped blades (S series)

ESM fan housing



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	W1G200-EC87-20		
Motor	M1G055-BD		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50/60	50/60
Method of obtaining data		ml	
Speed (rpm)	min ⁻¹	1300	900
Power consumption	W	8	
Current draw	A	0.07	
Max. back pressure	Pa	23	
Max. back pressure	inH2O	0.09	
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



W1G200-EC87-20

EC axial fan - ESM

sickle-shaped blades (S series)

ESM fan housing

Technical description

Weight	1 kg
Fan size	200 mm
Blade material	PA plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54; only with suitable plug, to be installed by customer
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Thermal overload protection for motor - Soft start - Speed selection max./min.
Speed levels	2
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	II
Conformity with standards	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Approval	CSA C22.2 No. 77; UL 1004-3; VDE; EAC


W1G200-EC87-20

EC axial fan - ESM

sickle-shaped blades (S series)


ESM fan housing

Product drawing

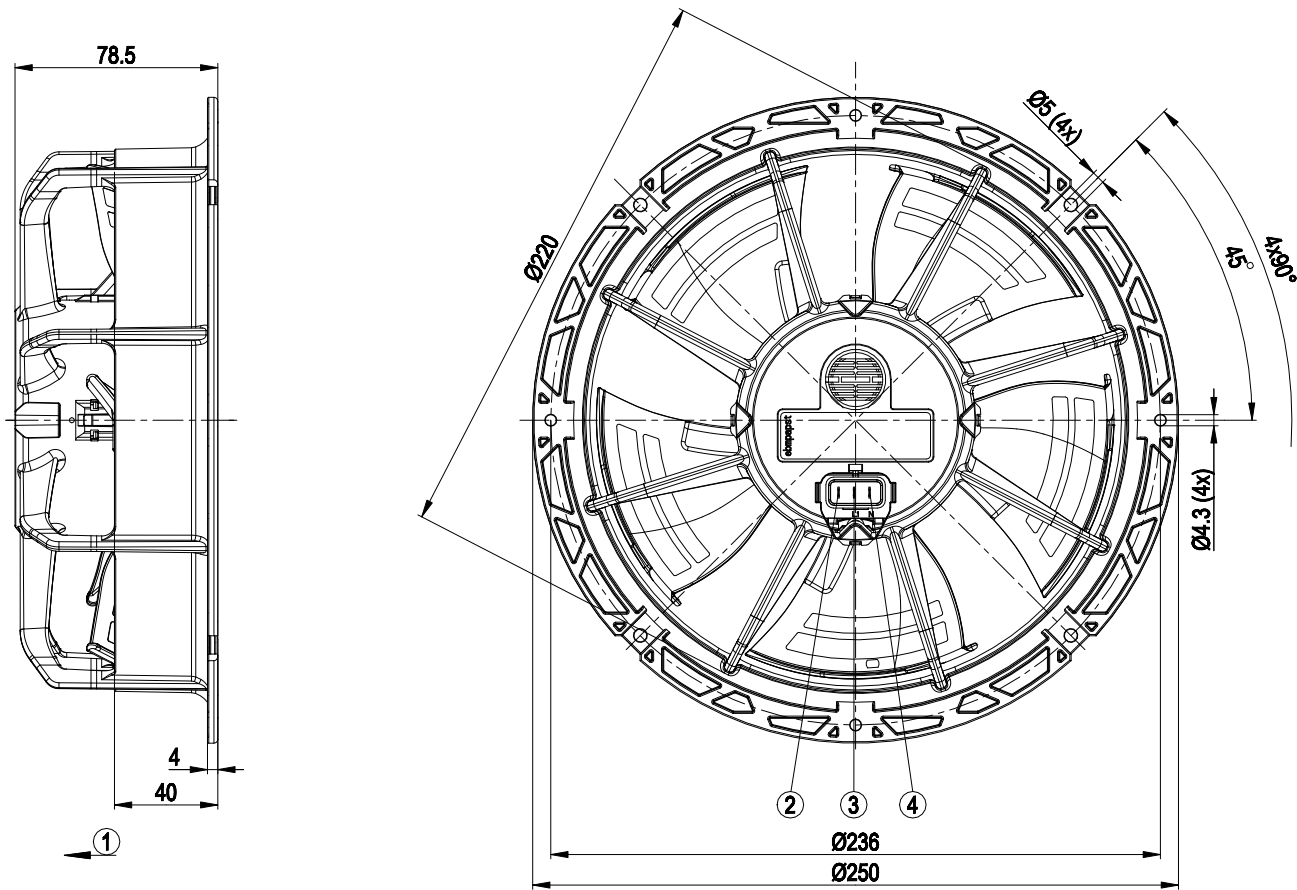

1	Direction of air flow "V"
2	Pin S, speed selection (flat plug 2.8 x 0.5)
3	Pin L1, phase (flat plug 2.8 x 0.5)
4	Pin N, neutral conductor (flat plug 2.8 x 0.5)

Connection diagram

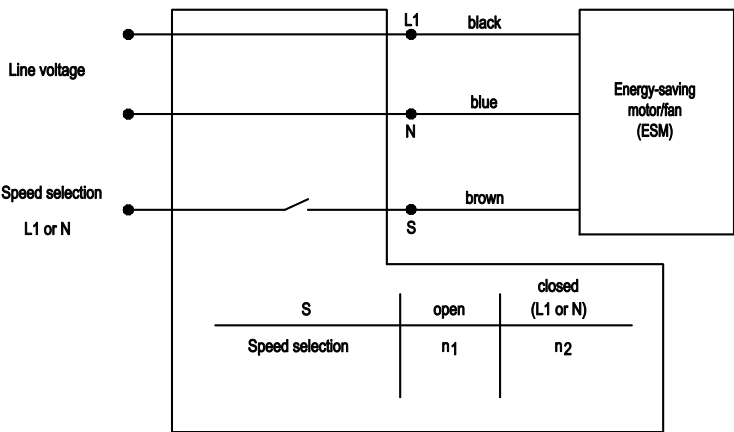


W1G200-EC87-20

EC axial fan - ESM

sickle-shaped blades (S series)

ESM fan housing

Curves: Air performance 50 Hz

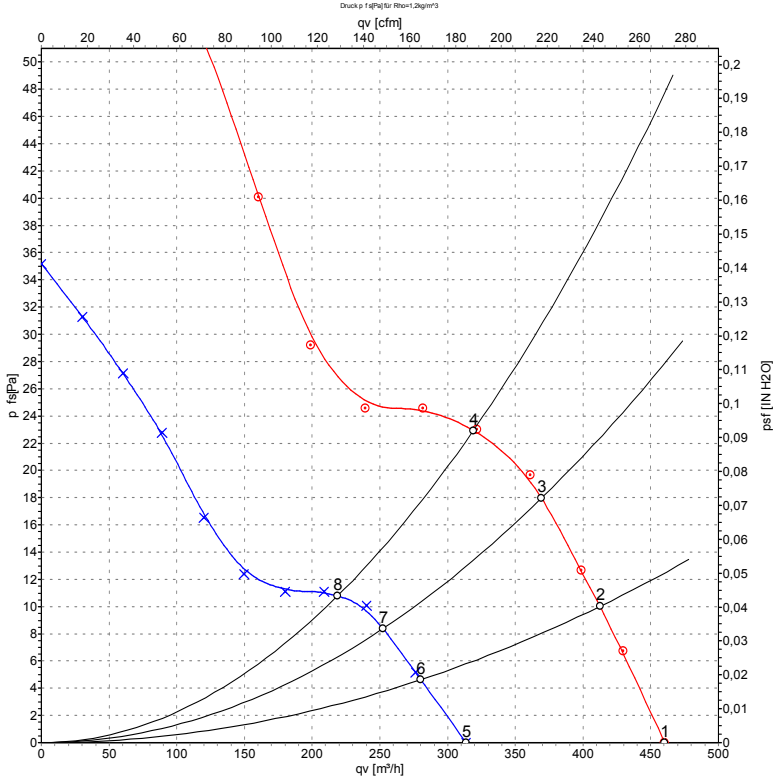

Measurement: LU-113354-1
Measurement: LU-113366-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	230	50	1300	7.0	0.06	42	50	460	0	270	0.00
2	230	50	1300	8.0	0.07	41	49	410	10	240	0.04
3	230	50	1300	8.0	0.07	40	48	370	18	215	0.07
4	230	50	1300	8.0	0.07	43	51	320	23	190	0.09
5	230	50	900	3.4	0.03	33	41	315	0	185	0.00
6	230	50	900	4.0	0.04	32	41	280	5	165	0.02
7	230	50	900	4.1	0.04	32	40	250	8	150	0.03
8	230	50	900	4.0	0.04	32	41	220	11	130	0.04

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

